







Guangdong Ynd Technological Lighting Co.,Ltd



GuangDong YND Technological Lighting Co.,Ltd
No 8, Yihui 3rd Road, Maohui Industrial Zone,
Henglan Town, Zhongshan, GuangDong, China.
www.yndled.com
info@yndled.com



WhatsApp



WeChat

DOWNLIGHT SYSTEMS

COMPANY PROFILE

About US

Yndlux established in 2009, is a leading LED lighting manufacturer based in Henglan, Zhongshan, GD. With a large facility more than 10000m² and a dedicated team of over 200 employees, we specialize in a wide range of LED lighting products, including Magnetic Lighting Systems, AC Track Light Systems, Linear Trunking Systems, Downlights, Office Lighting, Linear Aluminum Profiles, and smart lighting control systems.

Our products are certified with TUV, CE, GS, CB, 3C, ROHS, SAA, UKCA, and UL, ensuring their safety and quality. Our main focus is to provide comprehensive lighting solutions for all businesses.

15+
Years

200+
Staff

10000+
Area

ENTERPRISE STRENGTH

Raw Material Workshop



Assembly Production Line



Painting Workshop



AgingTestRoom 1




AgingTestRoom 2



High-Speed
SMT Workshop



IES DarkRoom
Testing Center

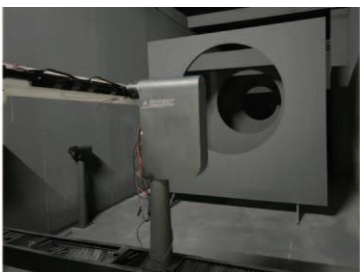

Integrating Sphere
Optical Test Center



HONNORS AND CERTIFICATES



Invite cooperator cordially

Service policy



Quality assurance Top Service


No franchise fee | Market protection | Agent VIP discounted price

Provide free terminal design, lighting design, promotional advertising, special promotions etc.

For more preferential policies, please contact.....

wireless control

Compatible with a wide range of control systems



Tmall



Tuya



Xiao Ai



Xiaomi



Huawei




Xiaodu



Amazon



Google Home



Apple Home

wired control

Global lighting control protocol

Dimmable / CCT Adjustable
Intelligent control series



0/1-10V

One of the DALI2 Community Members

Community Members (43)



contents

01 Round Recessed Downlight Series

	YND-DR5Y	12
	YND-W32	13
	YND-S32	14
	YND-DR2Y	15
	YND-DR1Y	16
	YND-DR5G	17
	YND-DR5A	18
	YND-DD75L2	19
	YND-101	20
	YND-026	21
	YND-DM	22
	YND-DF	23
	YND-DY	24
	YND-71031S	25
	YND-V32	26
	YND-DP	27
	YND-DPS	28
	YND-DP1	29
	YND-DP2	30
	YND-DR3	31

	YND-Dollar	32
	YND-DH	33
	YND-30E	34
	YND-1006	35
	YND-DZ2	36

02 Square Recessed Downlight Series

	YND-30F	38
	YND-DR5F	39
	YND-DR5F2	40
	YND-DR5F3	41
	YND-DPF	42
	YND-DPF1	43
	YND-DPF2	44
	YND-DPF3	45
	YND-DPF4	46
	YND-DYF	47
	YND-DYF2	48
	YND-DYF3	49
	YND-XBF	50
	YND-DR2	51
	YND-DL	52

contents

	YND-DR1F	53
	YND-Dollar	54
	YND-052A	56
	YND-052F	57
	YND-052	58

03 Round Edgeless Recessed Downlight Series

	YND-DR5W	60
	YND-DR1W	61
	YND-DPY1W	62
	YND-DPY2W	63

04 Square Edgeless Recessed Downlight Series

	YND-DPFW1	65
	YND-DPFW2	66
	YND-DPFW3	67
	YND-DPFW4	68
	YND-DR1FW	69

05 Surface Downlight Series

	YND-DXM	71
	YND-DJM	72
	YND-DBM	73

06 IP 65 Waterproof Downlight Series

	YND-F32	75
	YND-F25	76
	YND-F26	77
	YND-FDX	78

07 SMD Downlight Series


	YND-Q2	80
---	--------	----




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR5Y

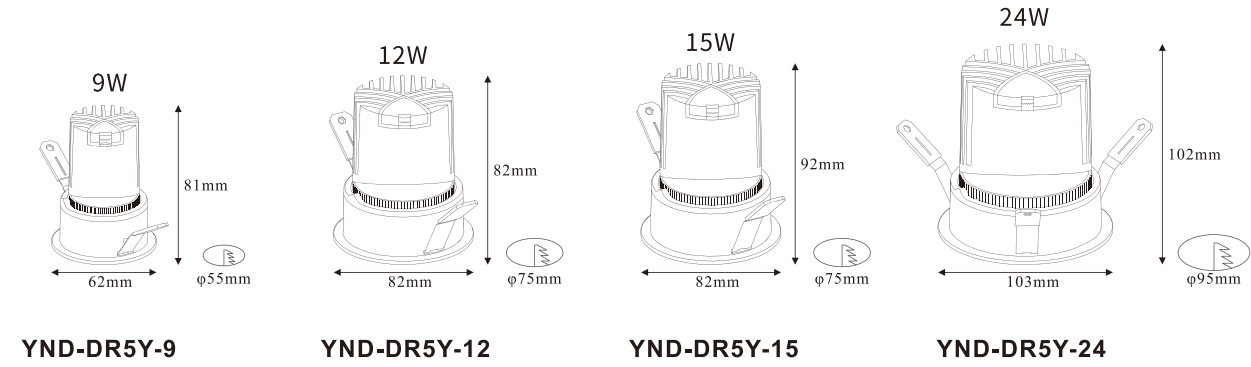

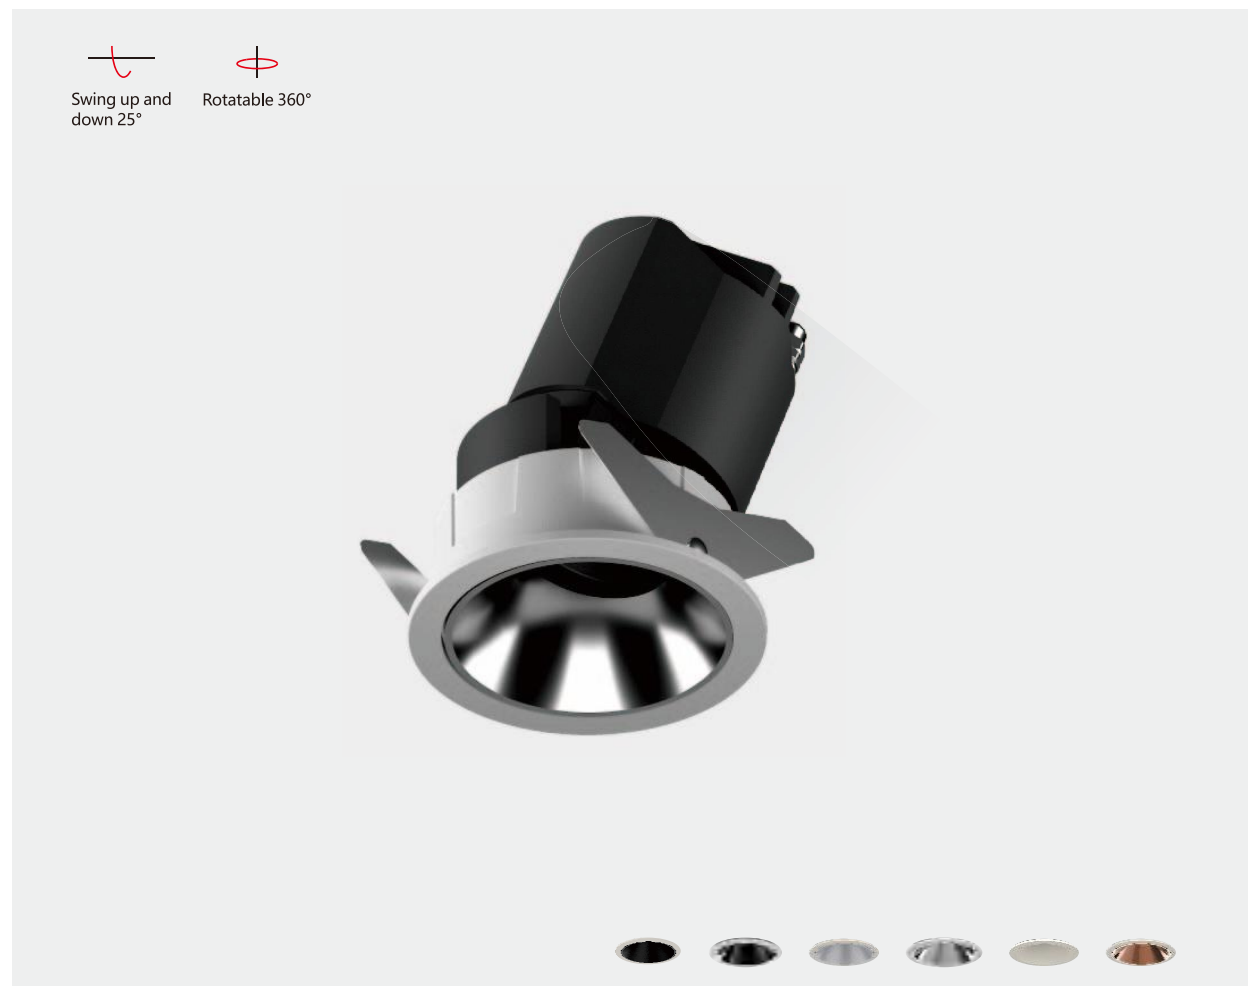

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/38°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

7W

85mm

61.5mm

φ55mm

YND-W32-7

12W

100mm

84mm

φ75mm

YND-W32-12


20W

128mm

105mm

φ95mm

YND-W32-20

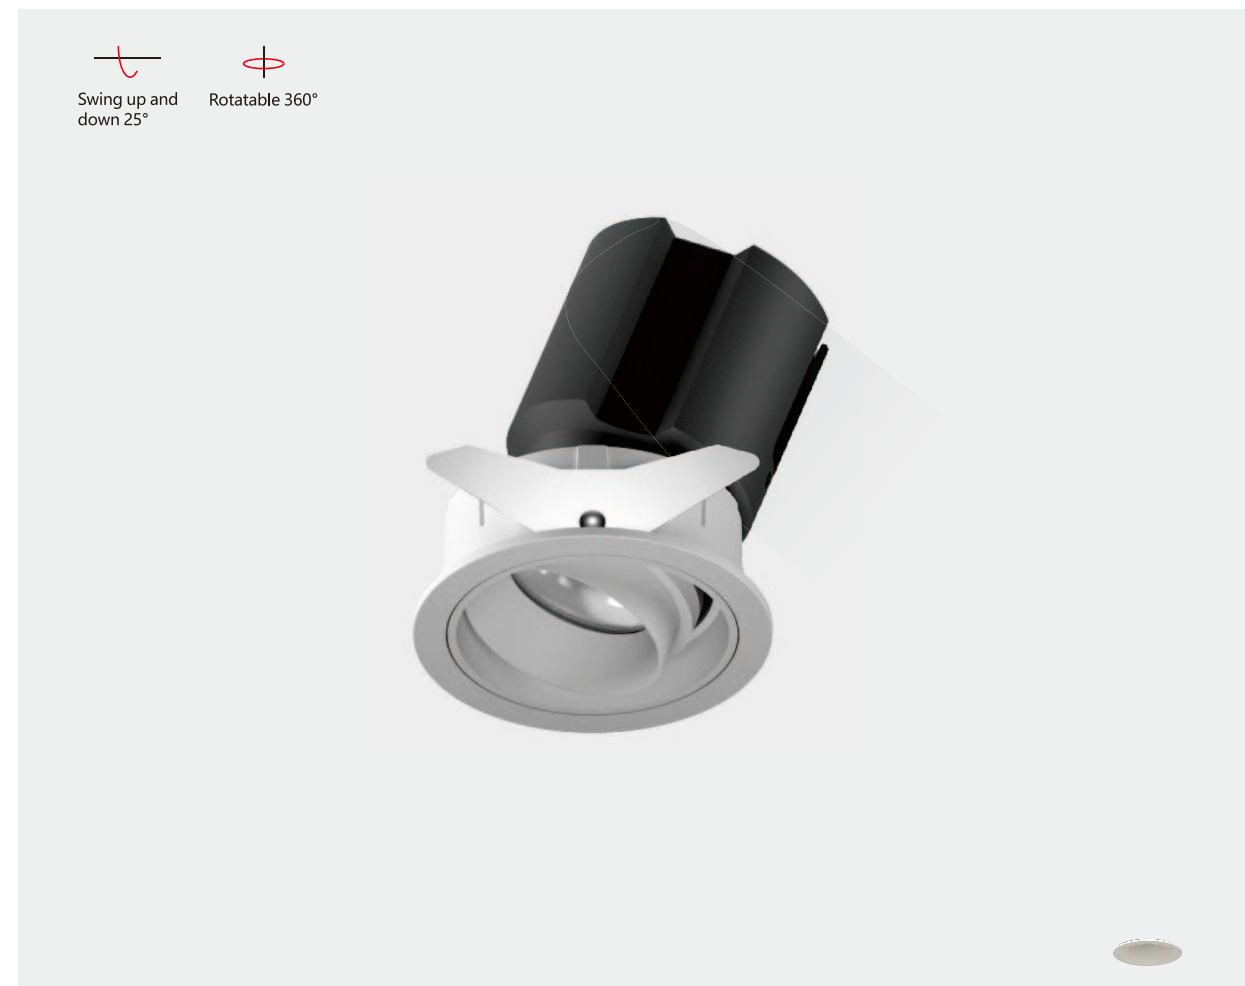

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 10°/15°/24°/38°/50°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

7W

85mm

61.5mm

φ55mm

YND-S32-7

20W

100mm

84mm

φ75mm

YND-S32-20

35W

128mm

105mm

φ95mm


YND-S32-35



Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DR2

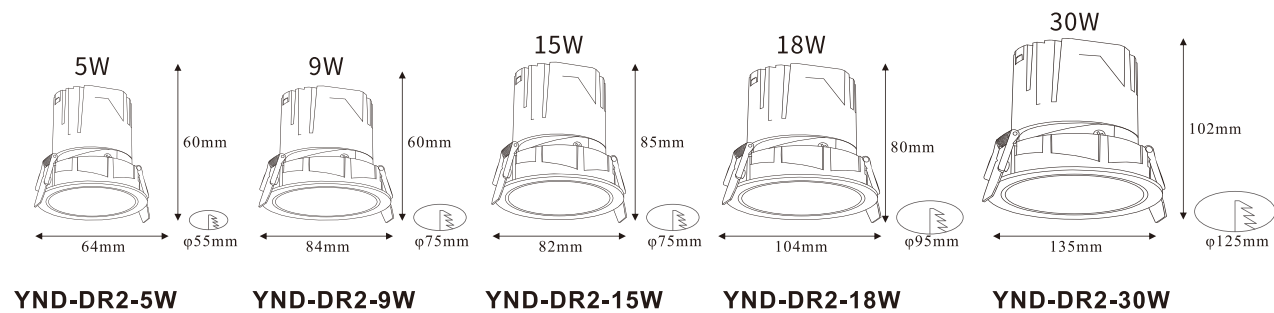


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR1Y

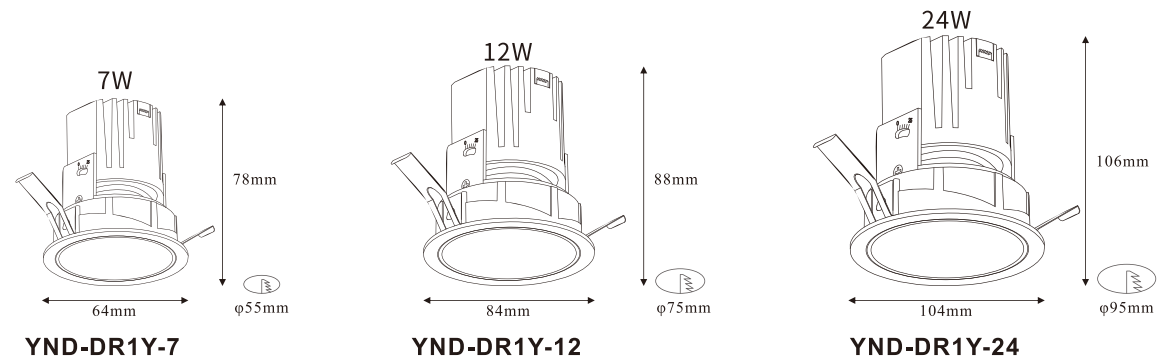


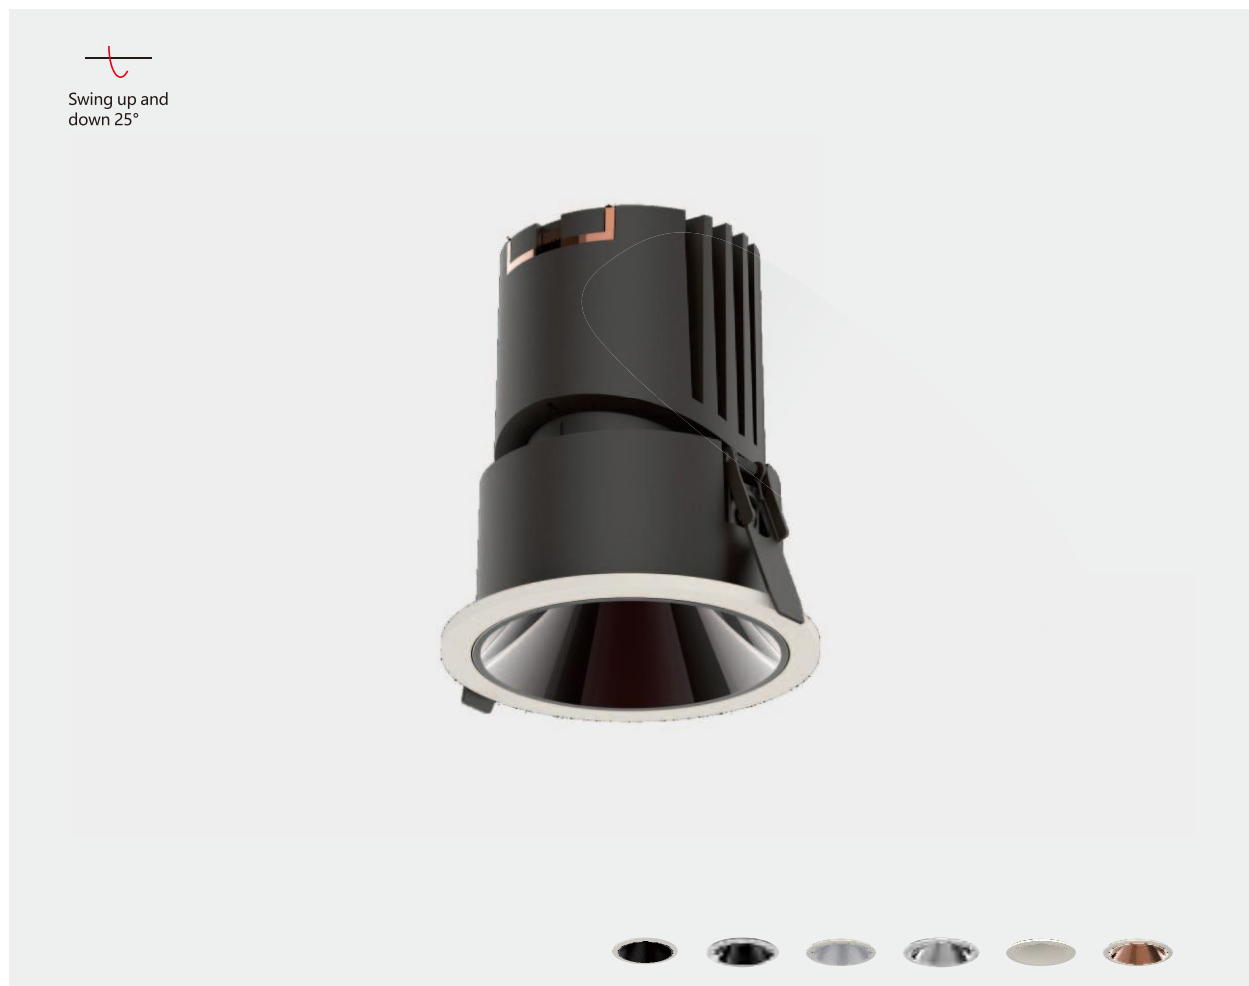

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DR5G

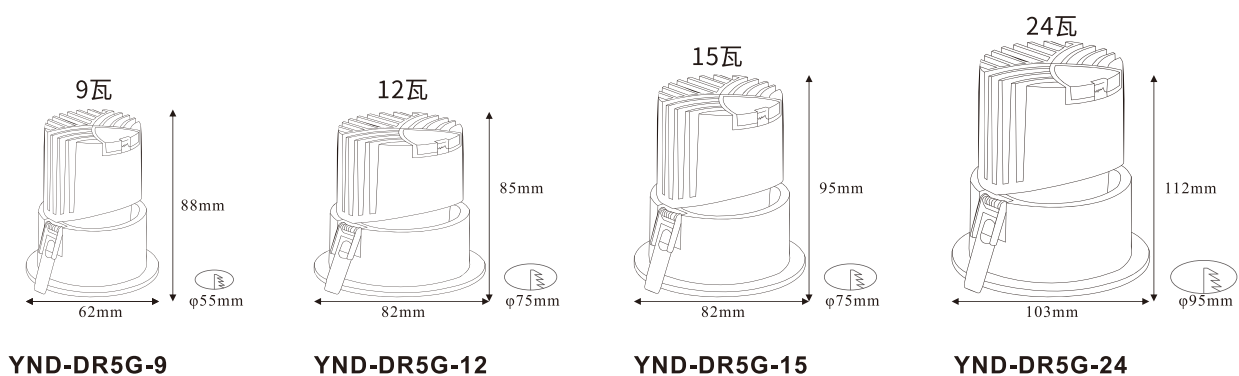

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR5A

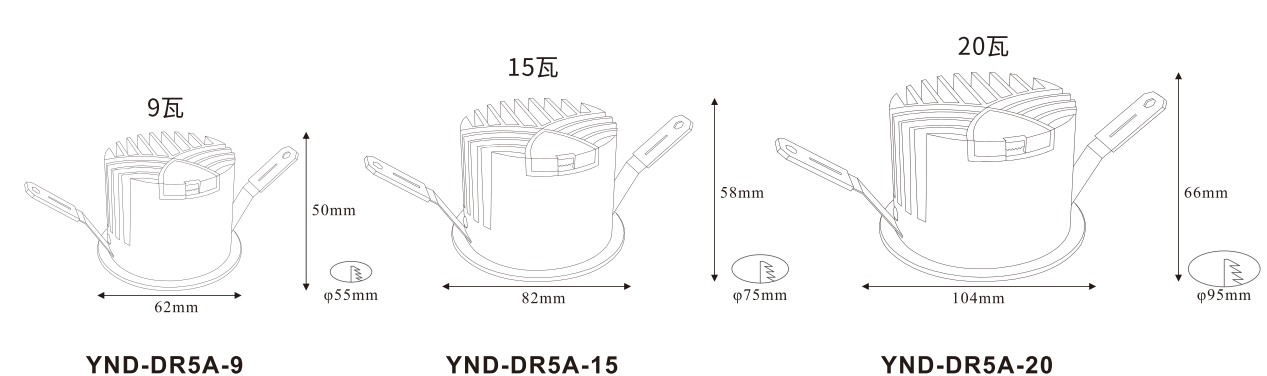



Voltage: AC220V

Material: 6063 Aluminum

Housing Color: Black/White/Customized

IP Rate: IP20

Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized


RA: ≥ 90 /Full spectrum

Beam Angle: 15°/24°/36°

Light source: Osram/Cree/Brigelux/Lumileds

IES FILE: Available On Request

YND-DD75L2

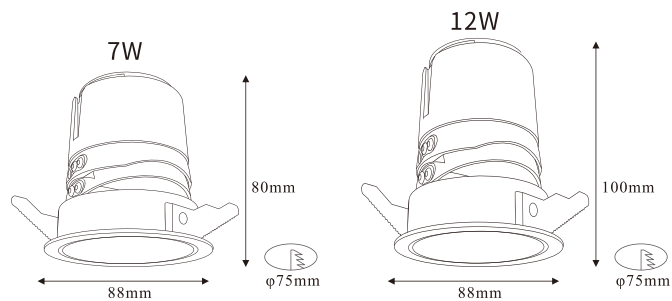

YND-DD75L2-7W

YND-DD75L2-12W



Voltage: AC220V

Material: 6063 Aluminum

Housing Color: Black/White/Customized

IP Rate: IP20

Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized


RA: ≥ 90 /Full spectrum

Beam Angle: 15°/24°/36°

Light source: Osram/Cree/Brigelux/Lumileds

IES FILE: Available On Request

YND-101

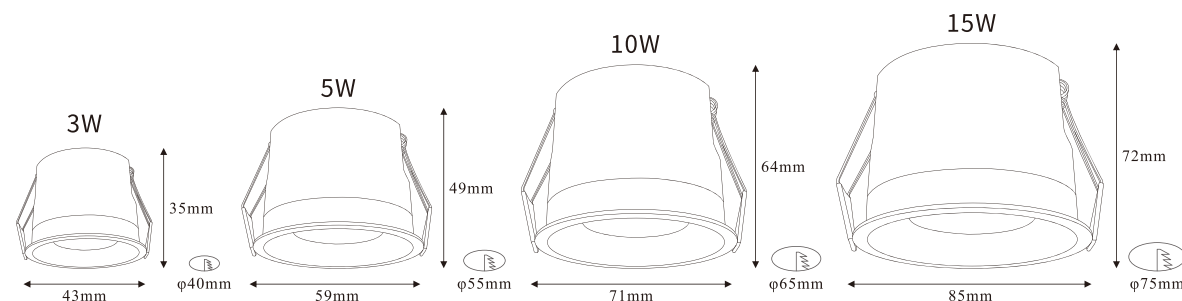


YND-101-3W

YND-101-5W

YND-101-10W

YND-101-15W

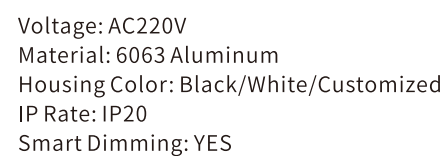


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

Technical drawings of the YND-026 series LED downlights, showing the top view and dimensions for four power ratings: 3W, 5W, 10W, and 15W.

Model	Power Rating	Mounting Bracket Diameter (mm)	Height (mm)
YND-026-3W	3W	60mm	75mm
YND-026-5W	5W	70mm	89mm
YND-026-10W	10W	80mm	108mm
YND-026-15W	15W	100mm	121mm

Each drawing includes a detail view of the mounting bracket, showing a diameter of $\phi 55\text{mm}$ for 3W, $\phi 65\text{mm}$ for 5W, $\phi 75\text{mm}$ for 10W, and $\phi 95\text{mm}$ for 15W.

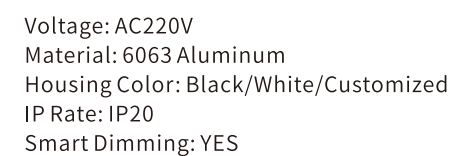

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 10°/24°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

Technical drawings of three LED downlight models, showing dimensions and power ratings.


Model	Power Rating	Outer Diameter (mm)	Height (mm)	Mounting Hole Diameter (mm)
YND-DMI-R35-3W	3W	42	53	35
YND-DMX-R50-5W	5W	60	65	50
YND-DMX-R60-9W	9W	70	71	60




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DF

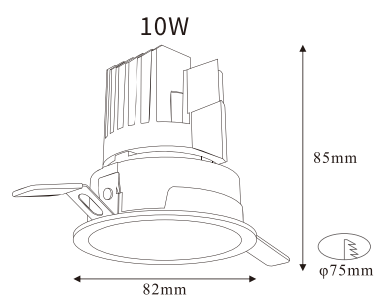


YND-DF-10

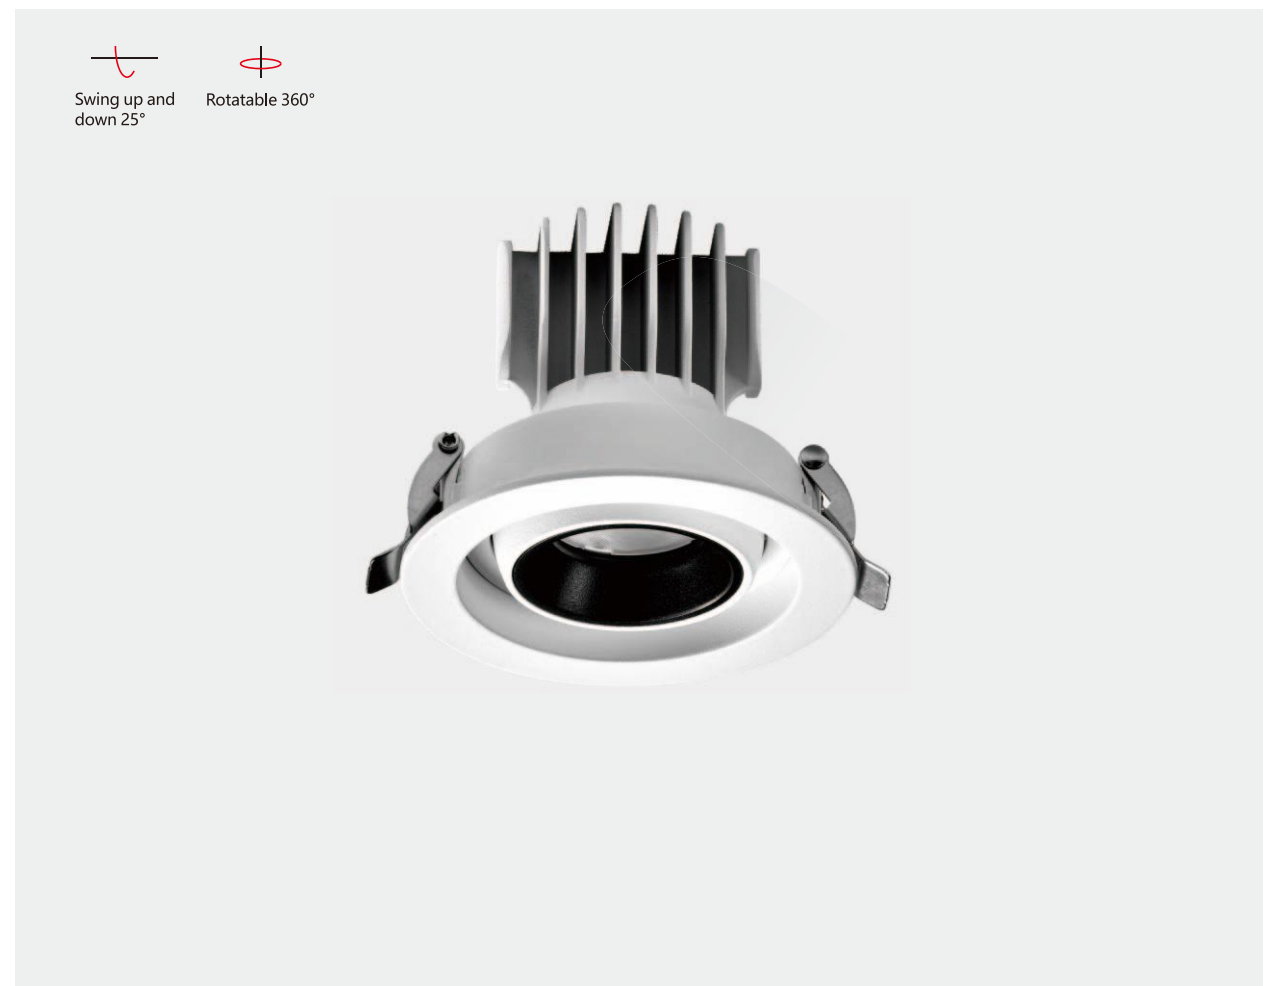

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DY

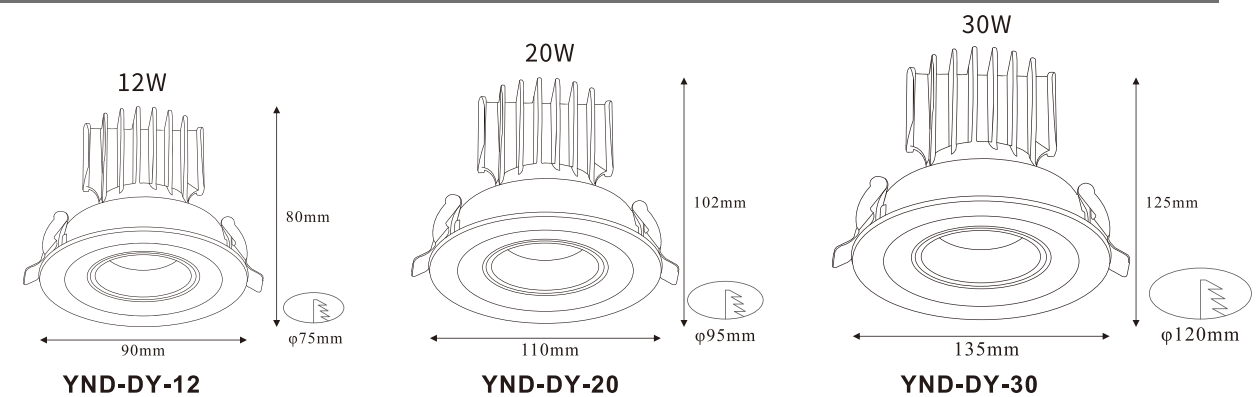

YND-DY-12

YND-DY-20



YND-DY-30

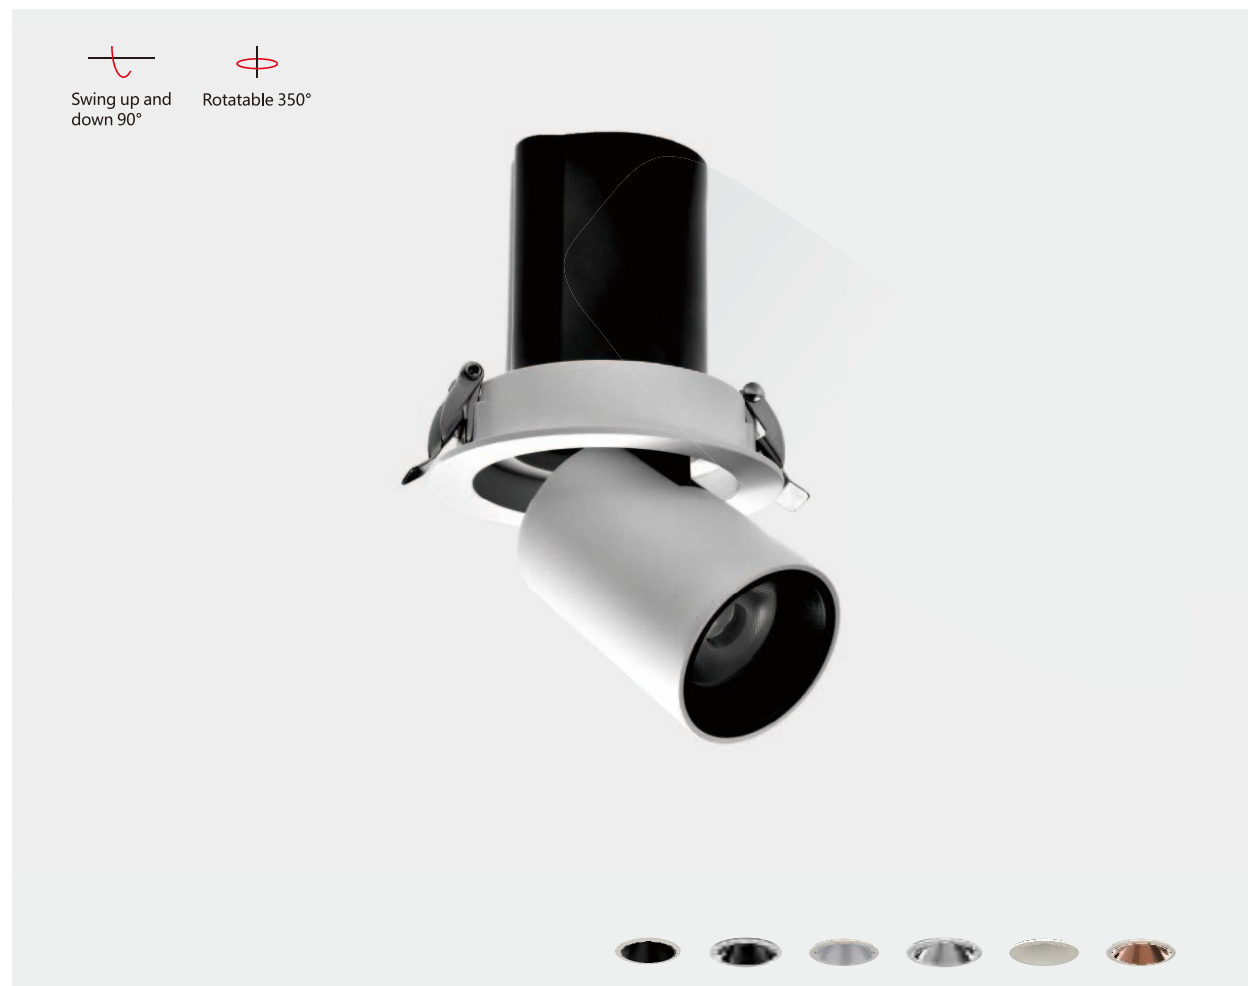

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-71031S

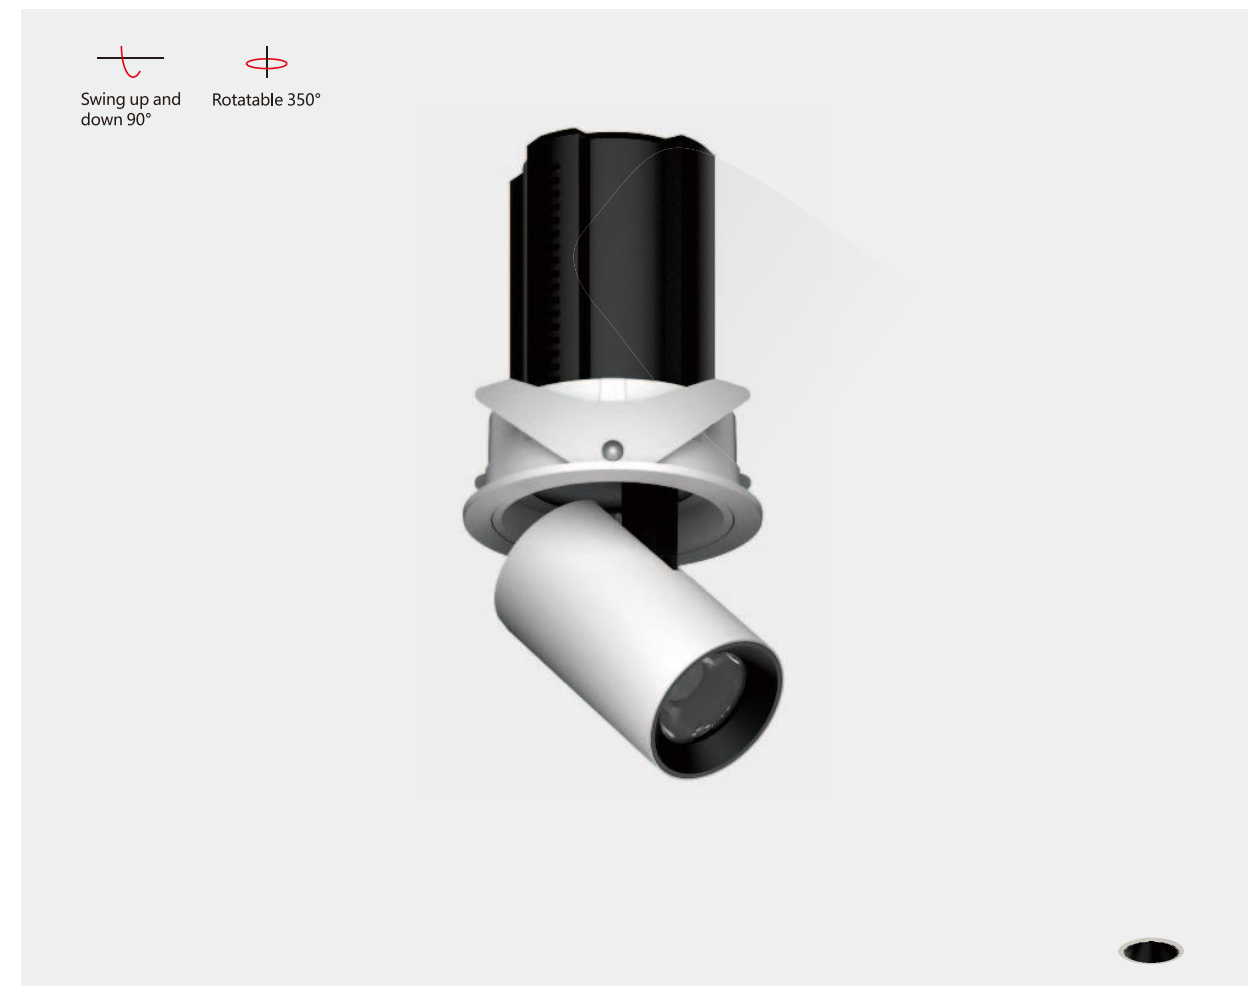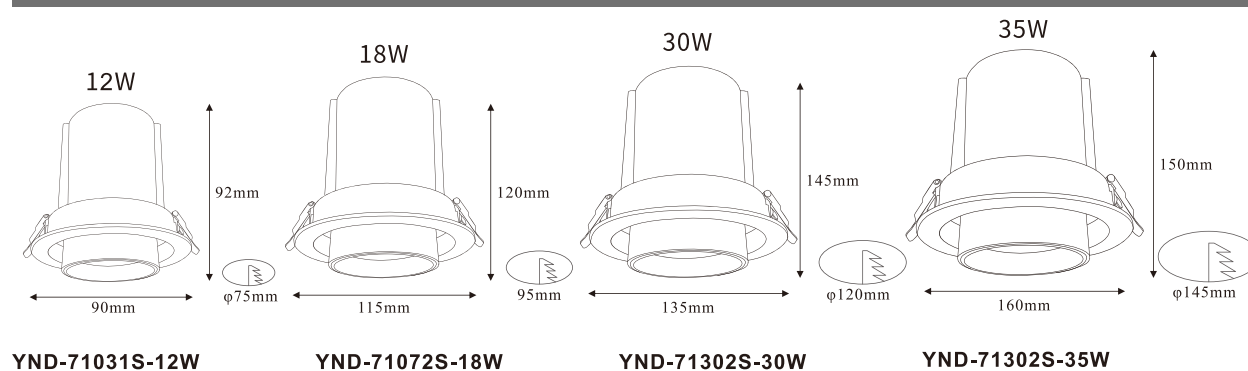

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 10°/15°/24°/38°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-V32

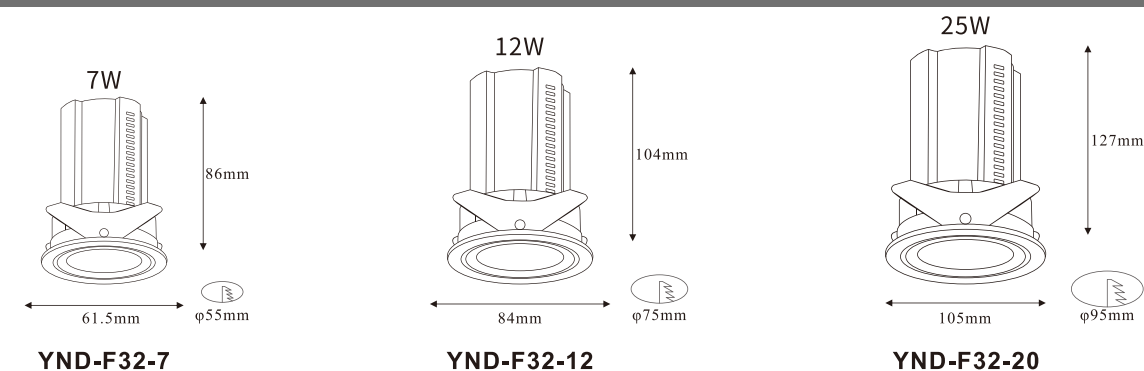



CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

Technical drawings of four LED downlight models, showing dimensions and power ratings:

- YND-DP-7**: 7W, 62mm diameter, 90mm height.
- YND-DP-12**: 12W, 83mm diameter, 98mm height.
- YND-DP-18**: 18W, 106mm diameter, 106mm height.
- YND-DP-25**: 25W, 106mm diameter, 130mm height.




CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

7W 62.5mm 64.5mm $\phi 55\text{mm}$ YND-DPS-7

10W 79mm 85mm $\phi 75\text{mm}$ YND-DPS-10

15W 97mm 105mm $\phi 95\text{mm}$ YND-DPS-15


24W 126mm 133mm $\phi 120\text{mm}$ YND-DPS-24

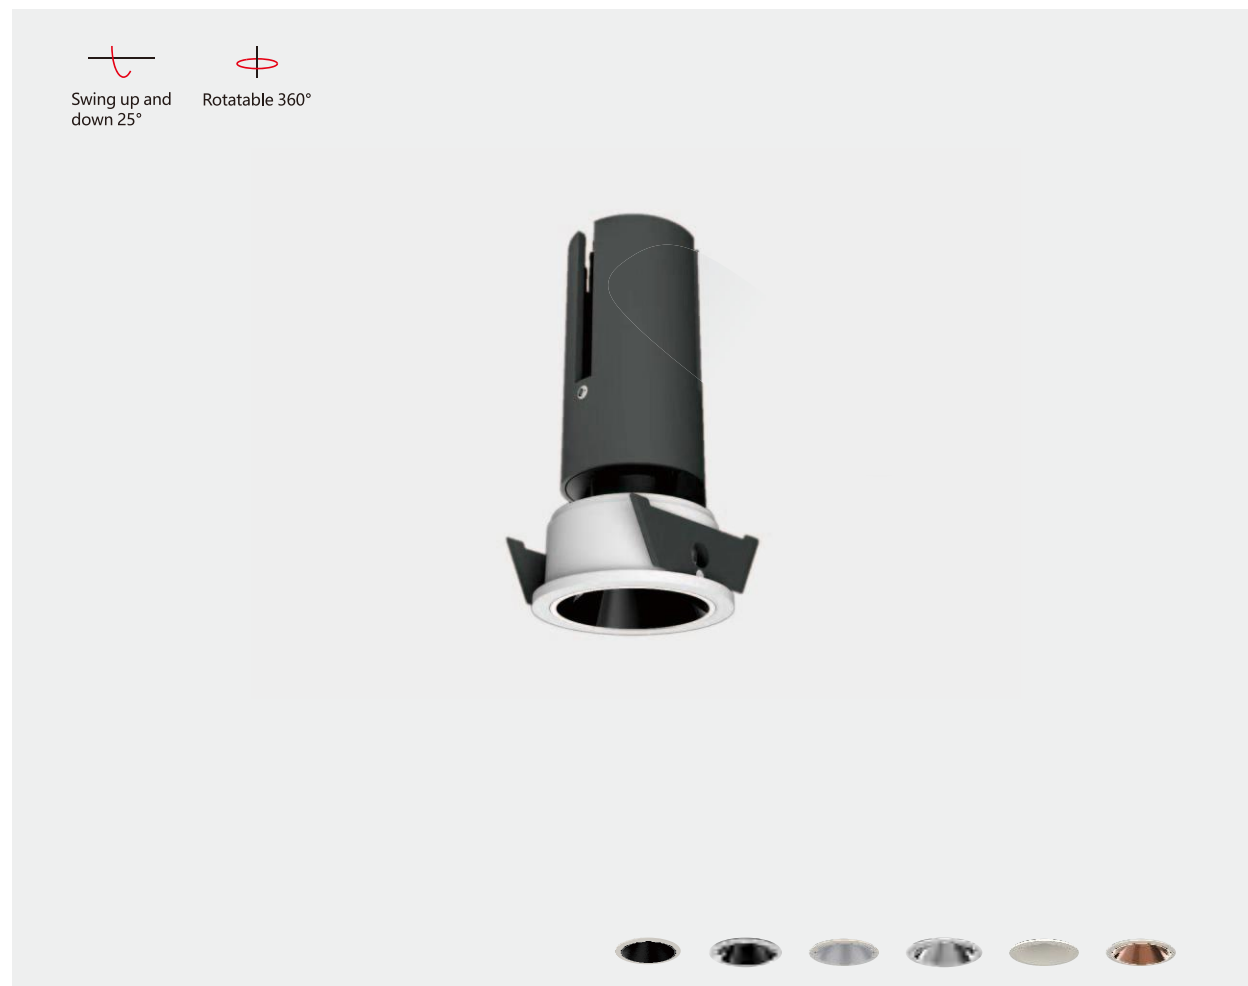

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/30°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DP1

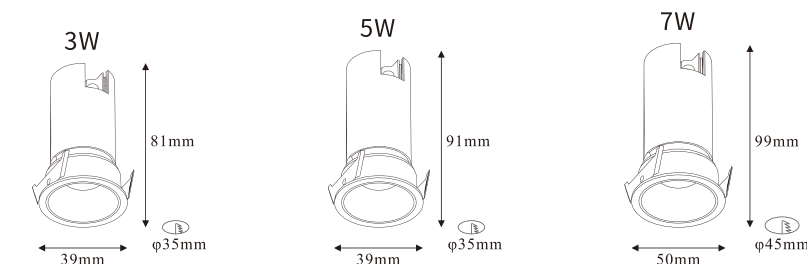

YND-DP1-3

YND-DP1-5


YND-DP1-7

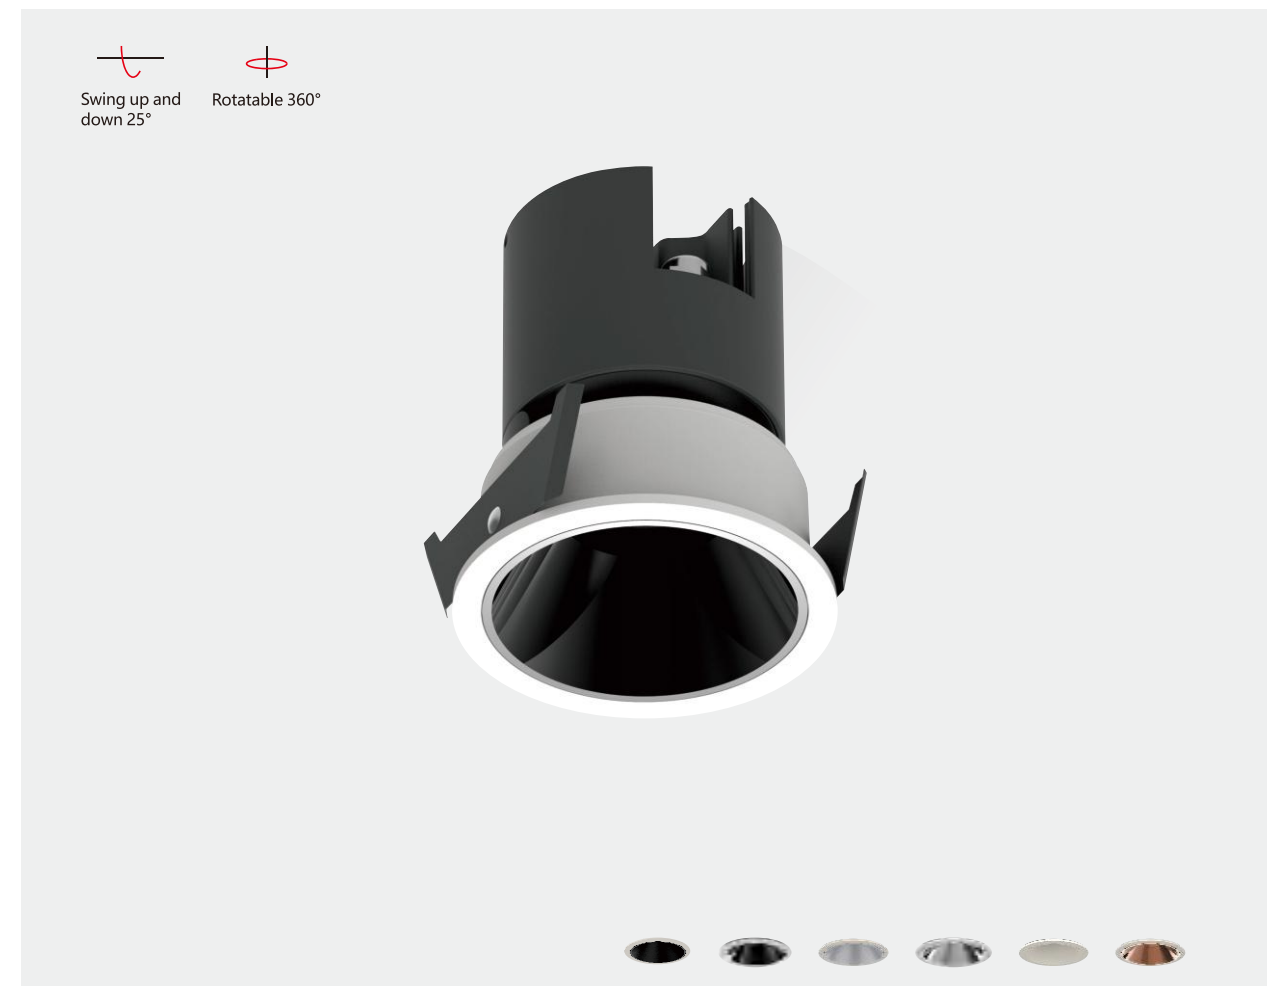

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DP2

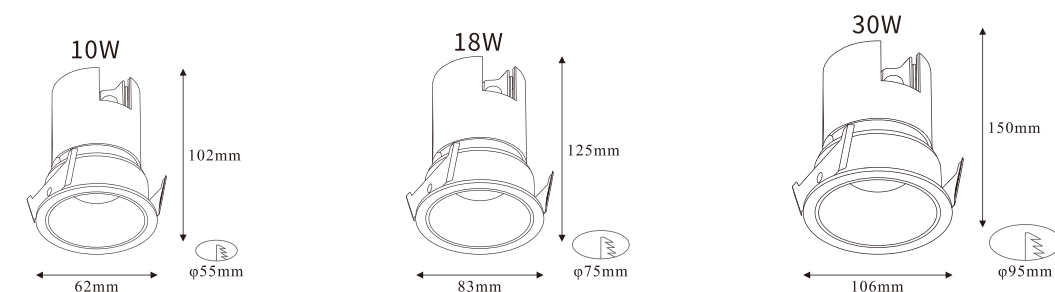

YND-DP2-10

YND-DP2-18


YND-DP2-30



Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR3

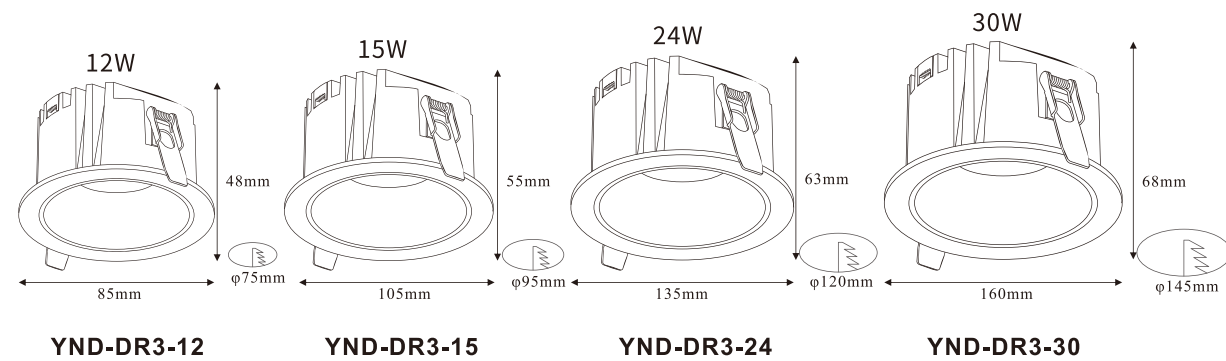


Swing up and down 25°
Rotatable 360°



Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-Dollar

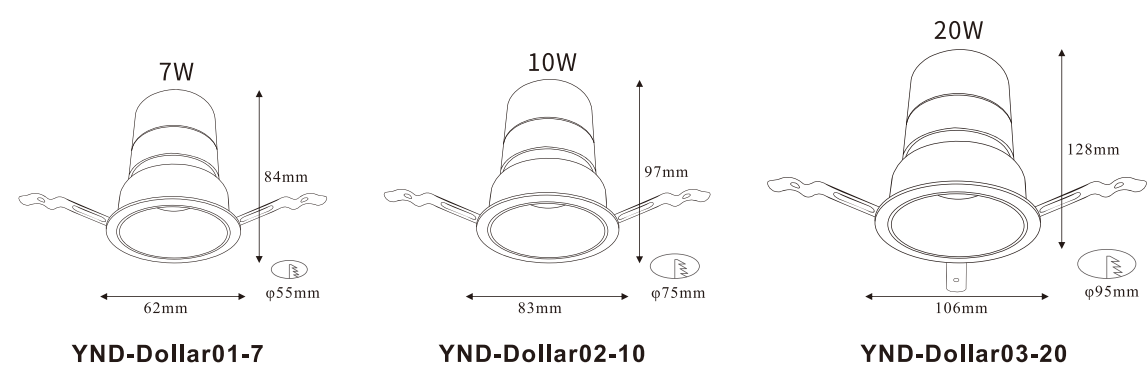




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DH

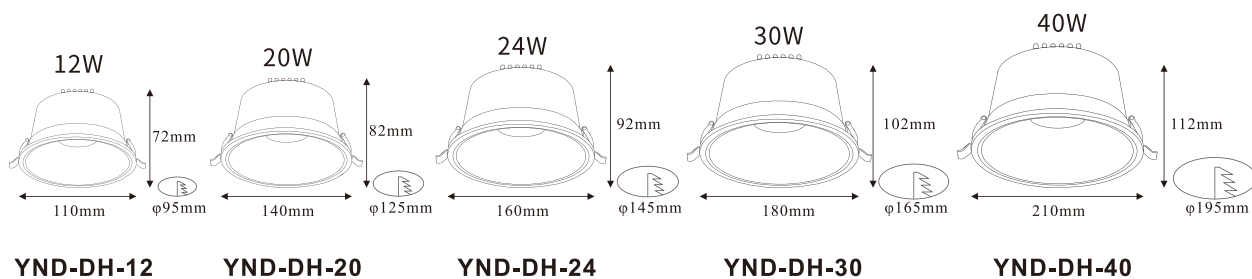

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-30E

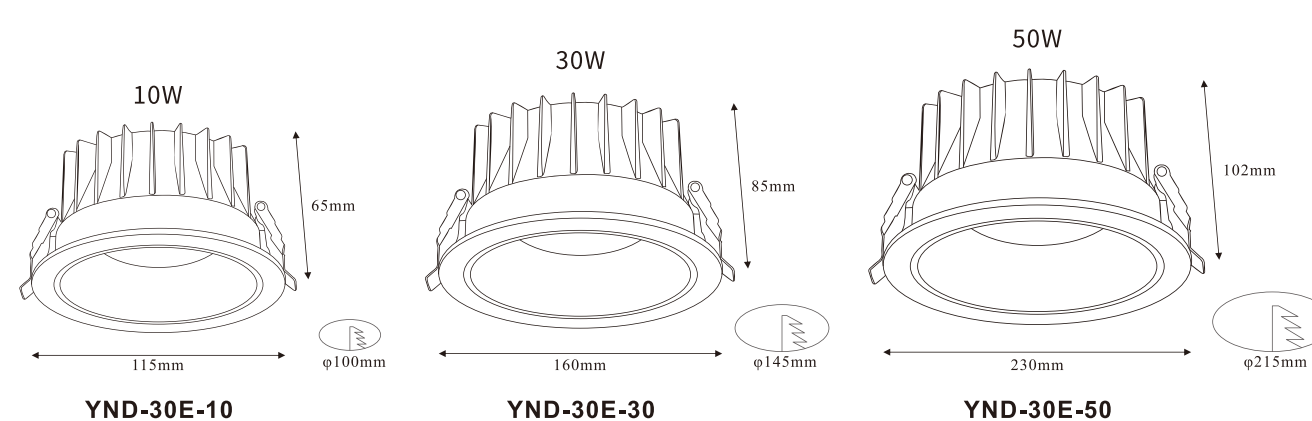




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 50°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request


YND-1006

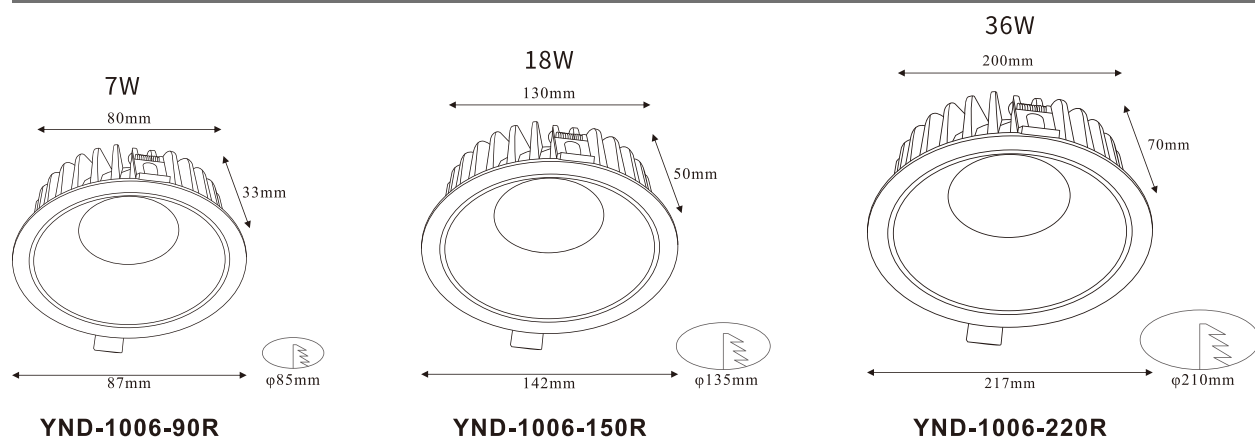

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

YND-DZ2

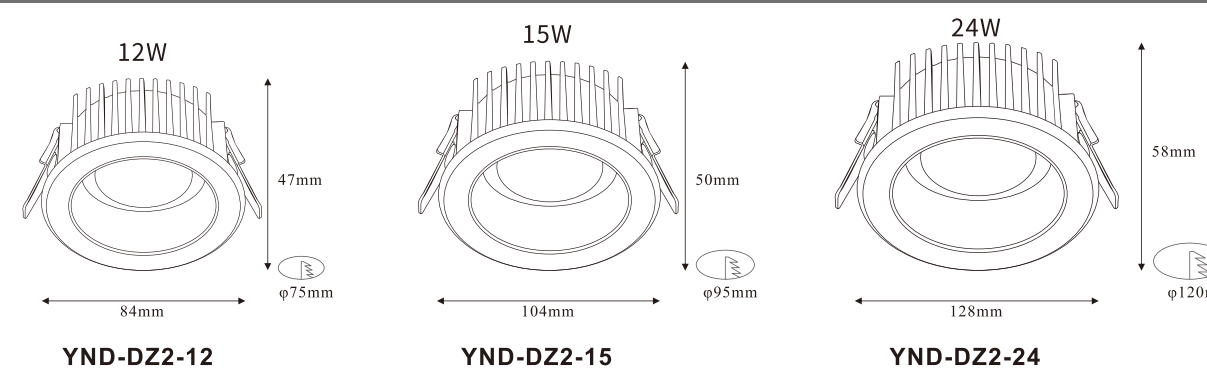




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

YND-30F

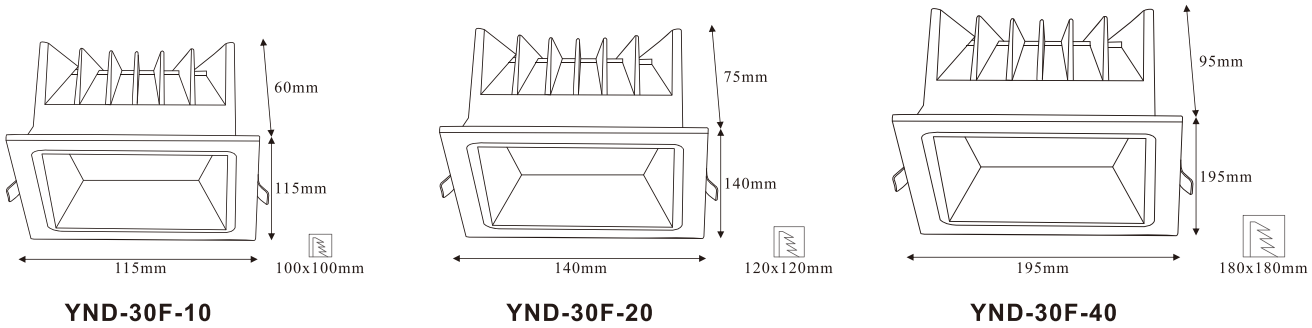




Voltage: AC220V
 Material: 6063 Aluminum
 Housing Color: Black/White/Customized
 IP Rate: IP20
 Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
 RA: ≥ 90 /Full spectrum
 Beam Angle: 15°/24°/36°
 Light source: Osram/Cree/Brigelux/Lumileds
 IES FILE: Available On Request

YND-DR5F

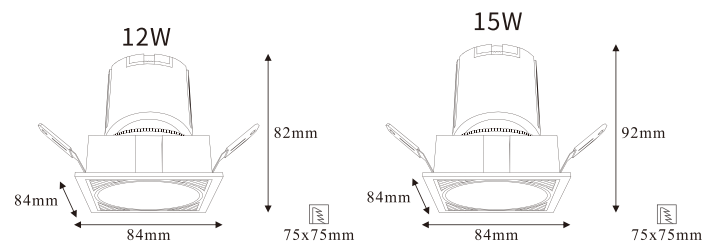

YND-DR5F-12


YND-DR5F-15



Voltage: AC220V
 Material: 6063 Aluminum
 Housing Color: Black/White/Customized
 IP Rate: IP20
 Smart Dimming: YES


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
 RA: ≥ 90 /Full spectrum
 Beam Angle: 15°/24°/36°
 Light source: Osram/Cree/Brigelux/Lumileds
 IES FILE: Available On Request

YND-DR5F2

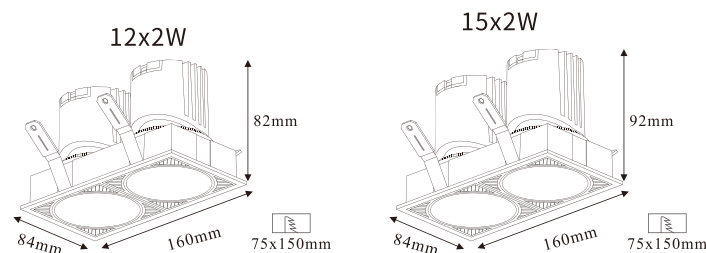

YND-DR5F2-12x2



YND-DR5F2-15x2

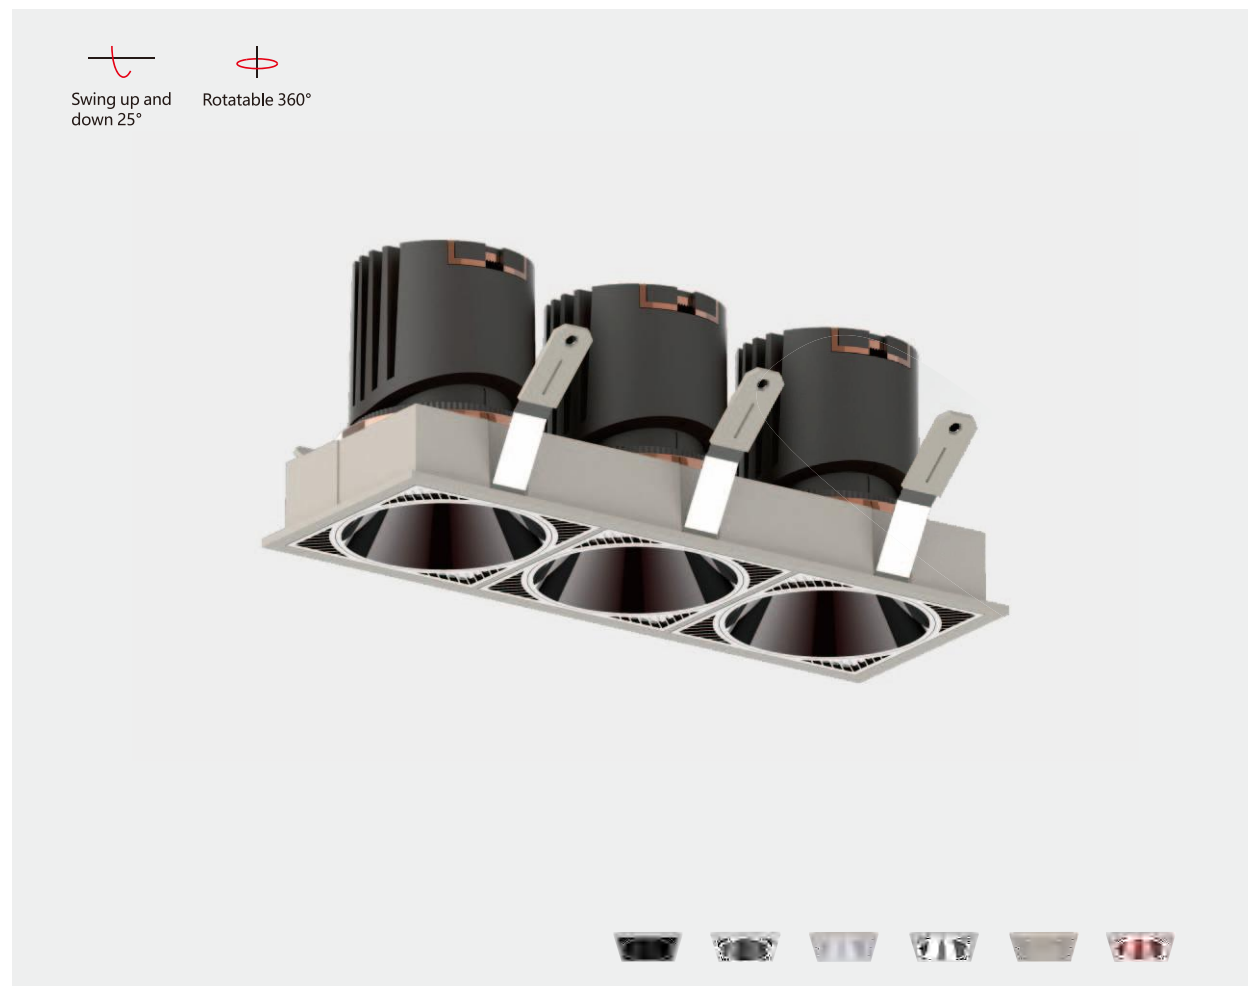

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DR5F3

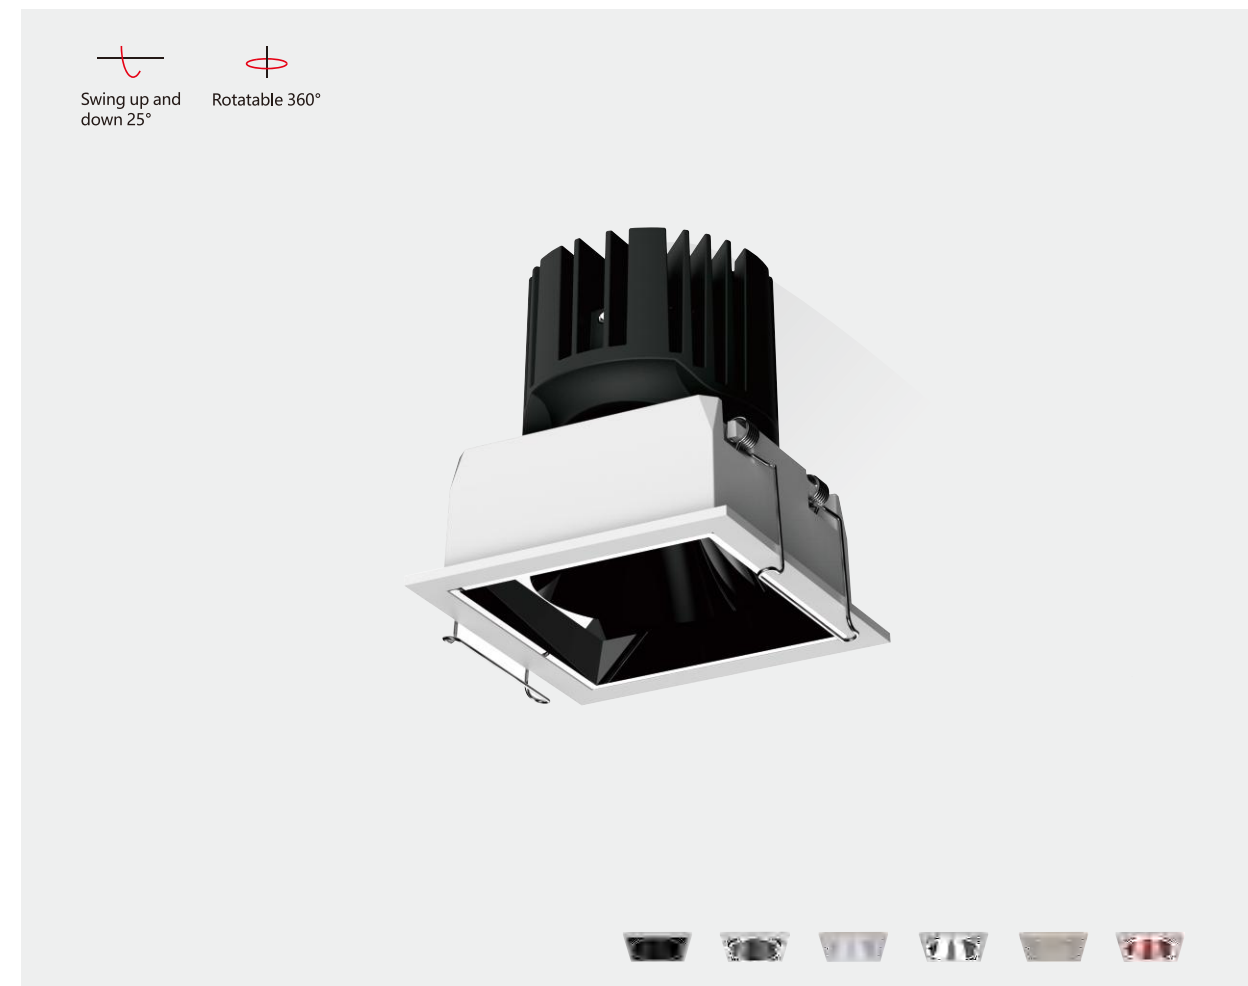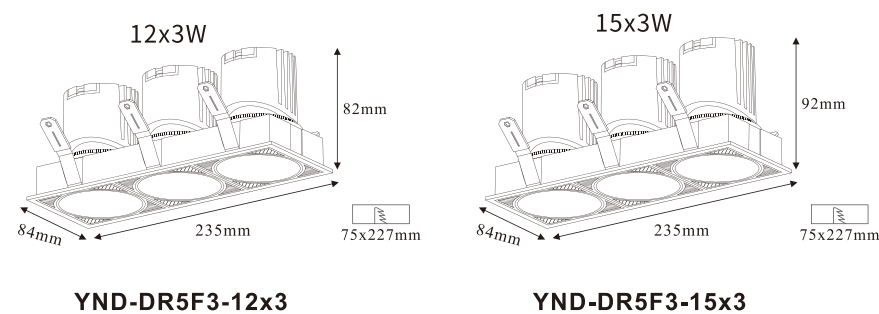


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPF

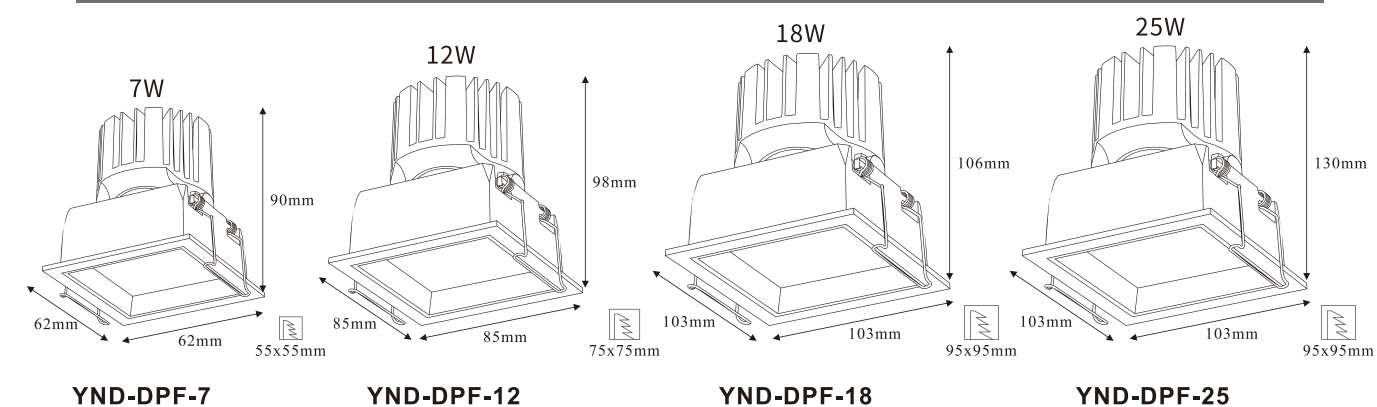


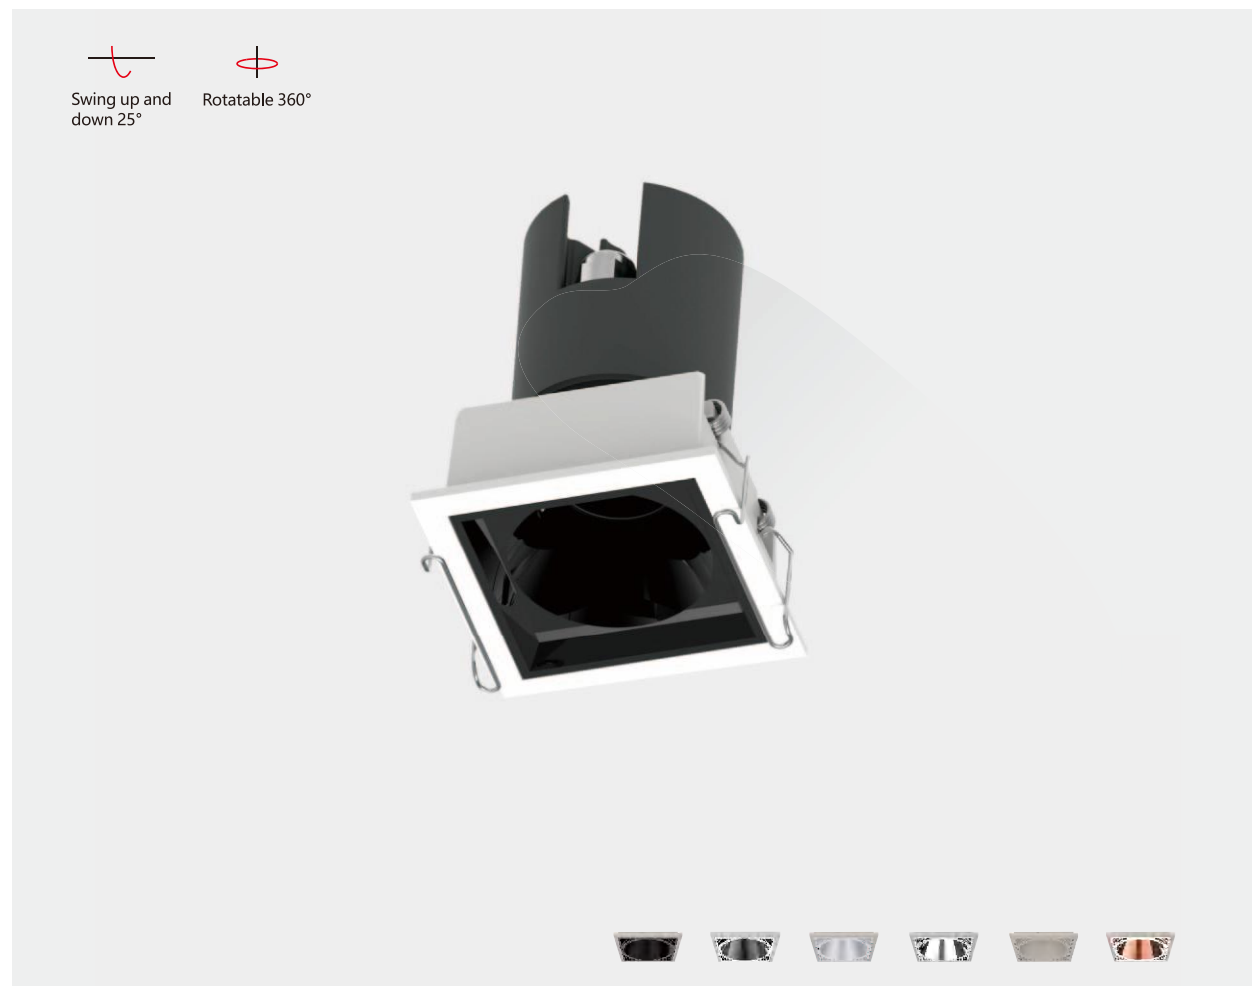

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DPF1

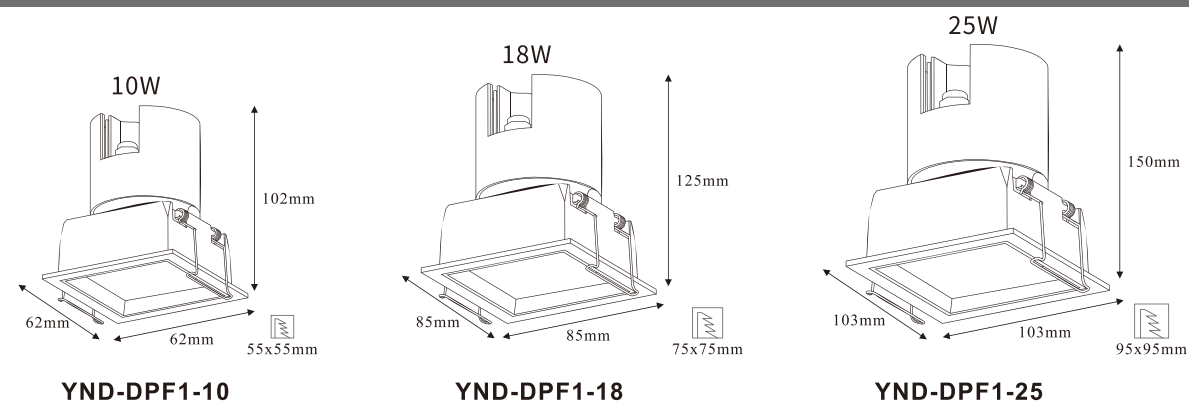

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPF2

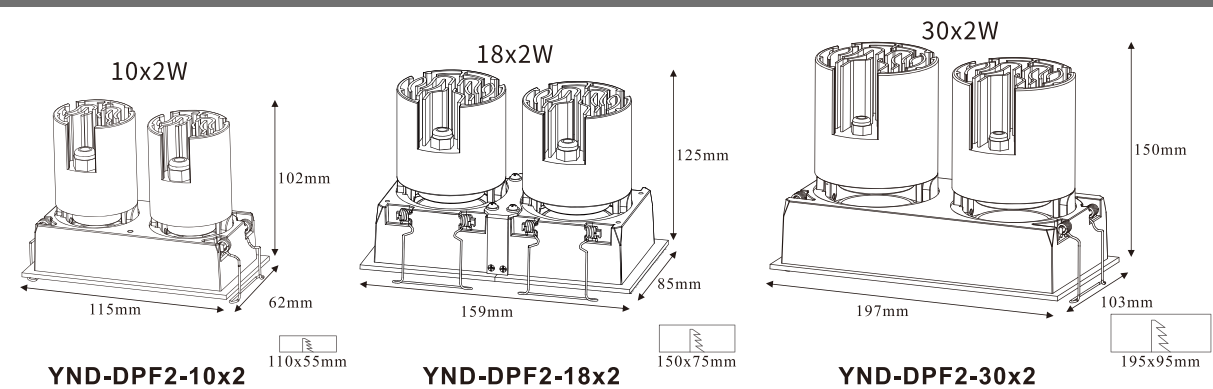




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DPF3

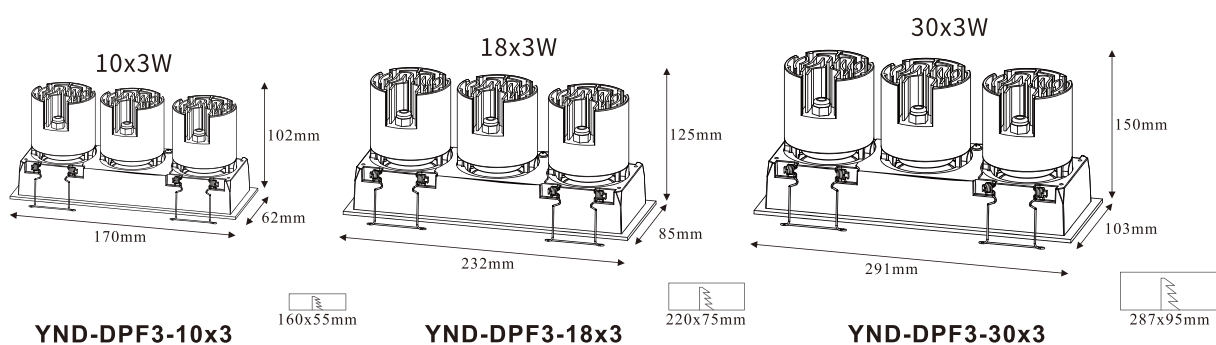


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPF4

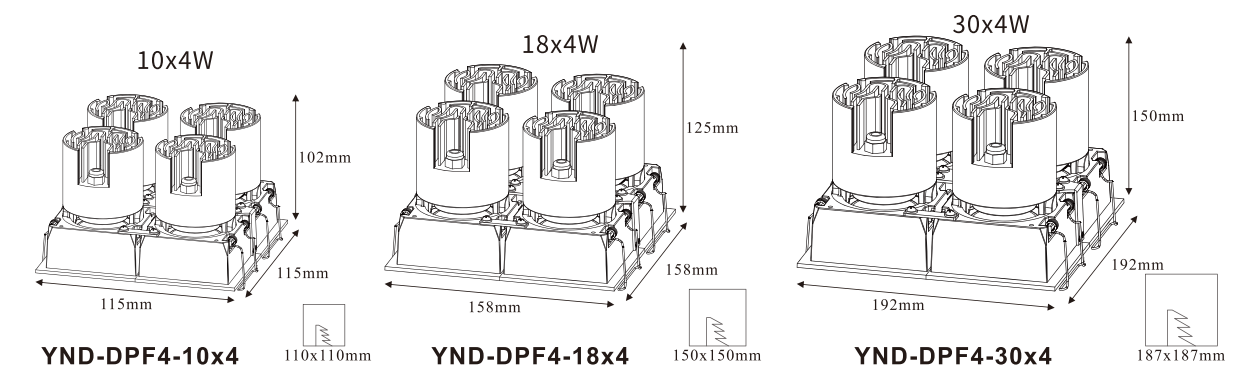


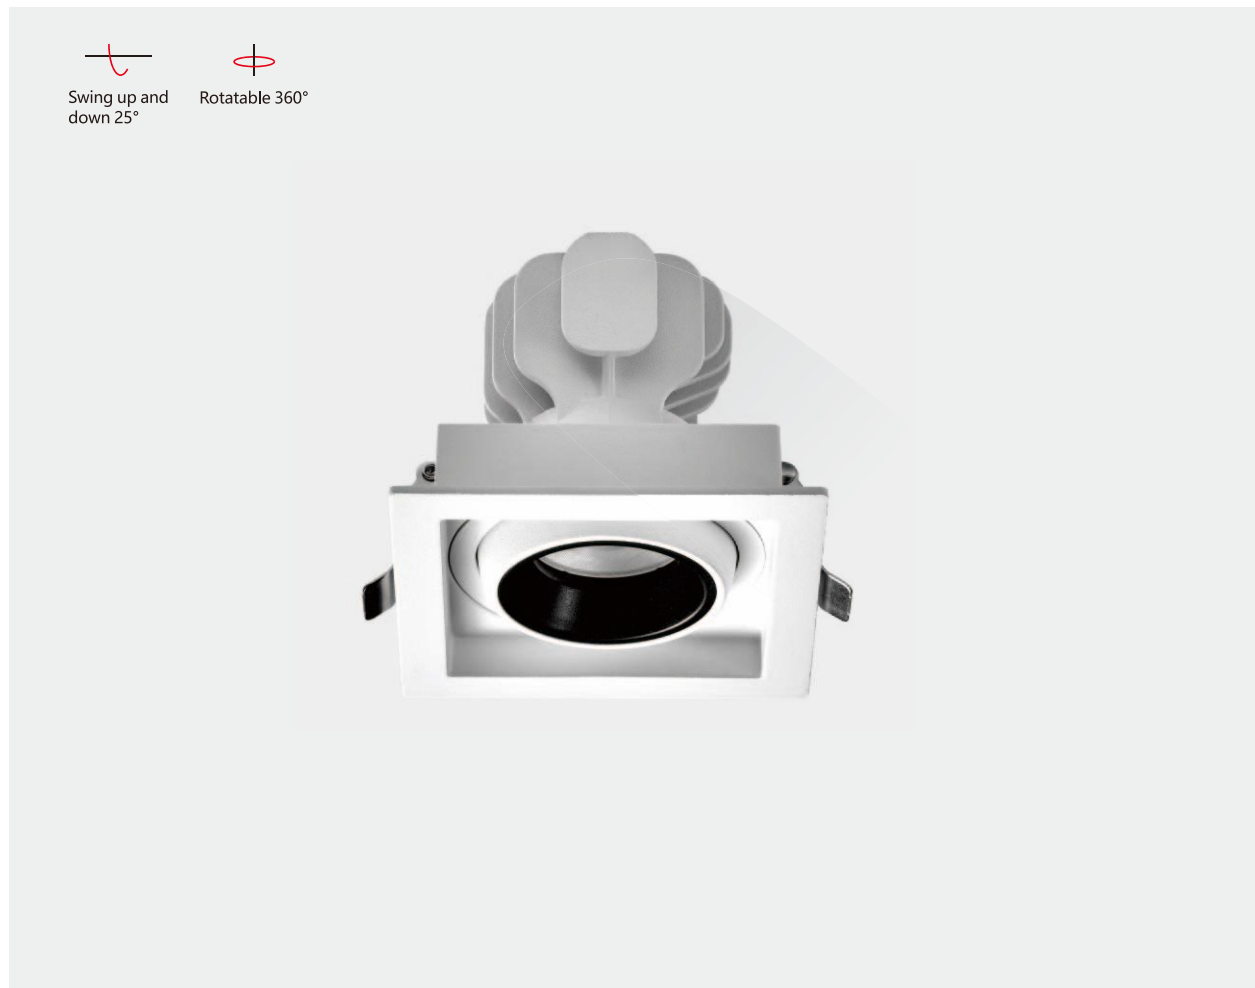

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DYF

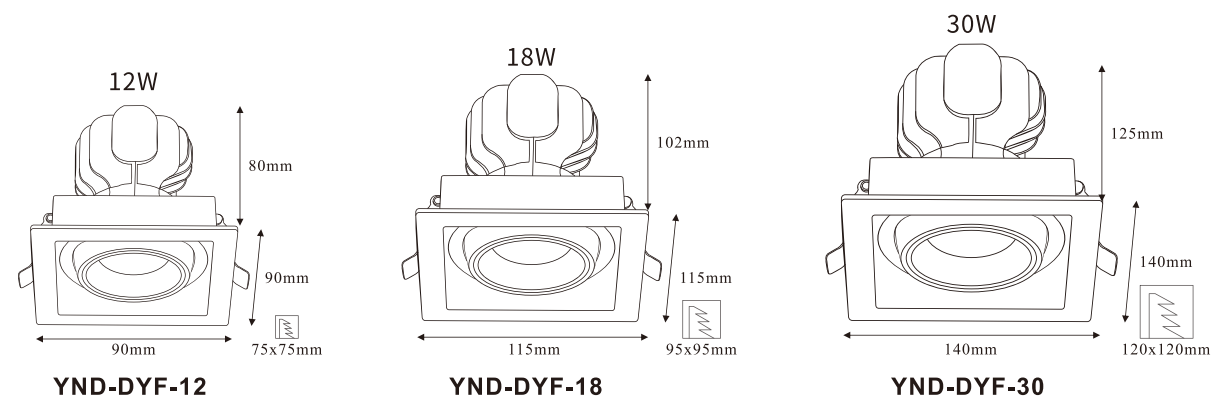


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DYF2

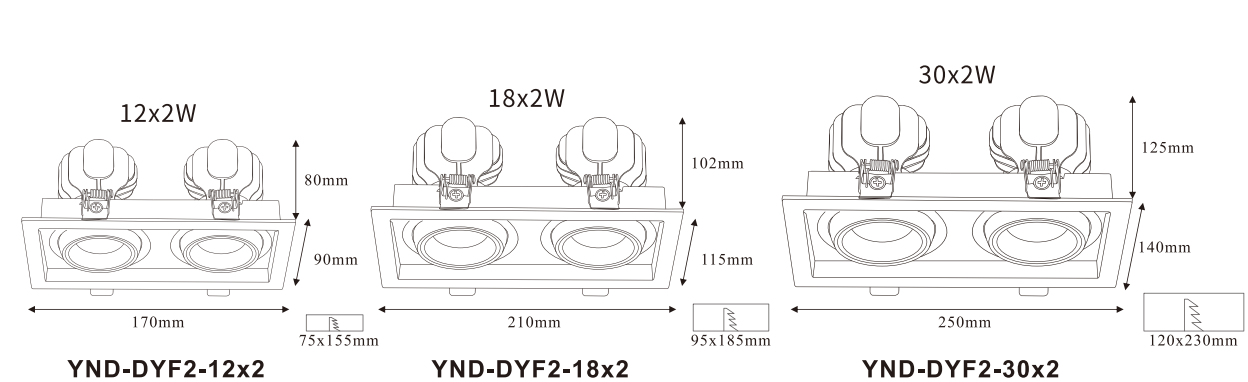


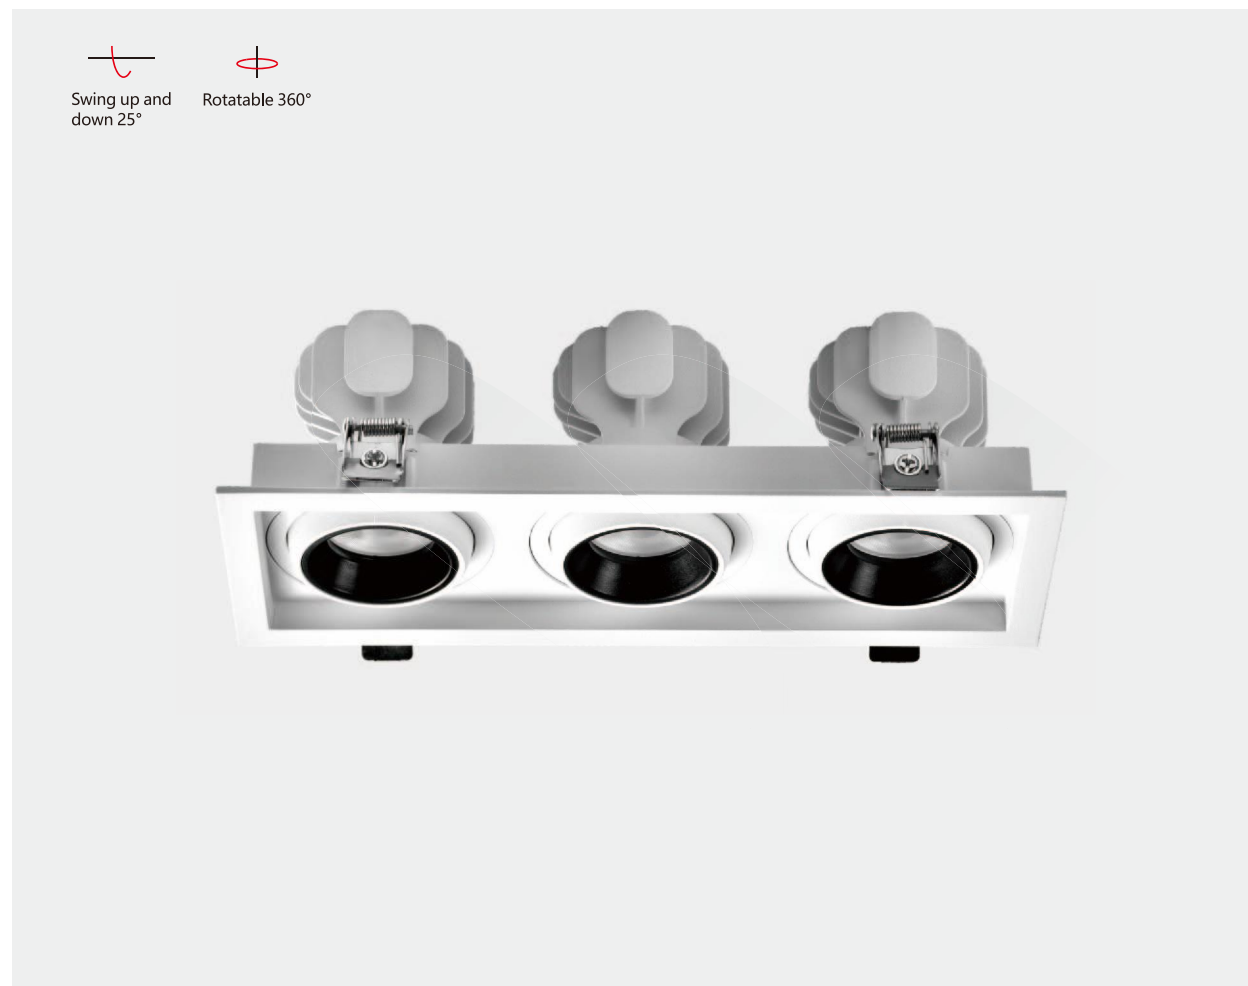

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/50°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DYF3

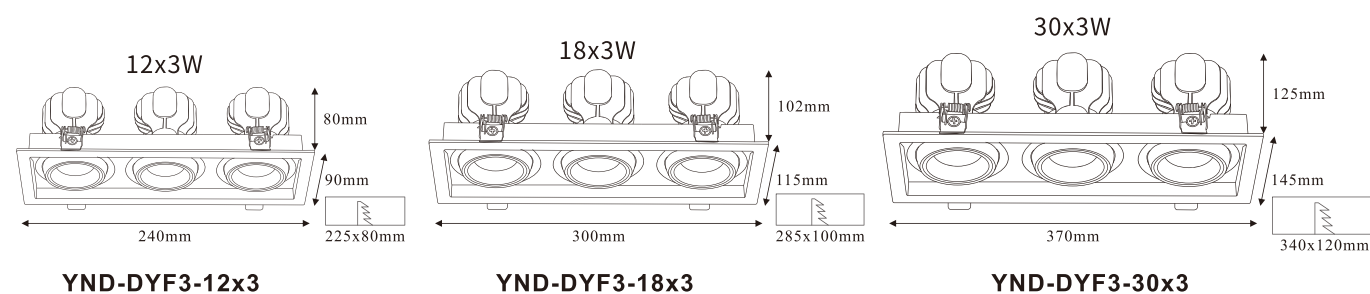

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/38°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-XBF

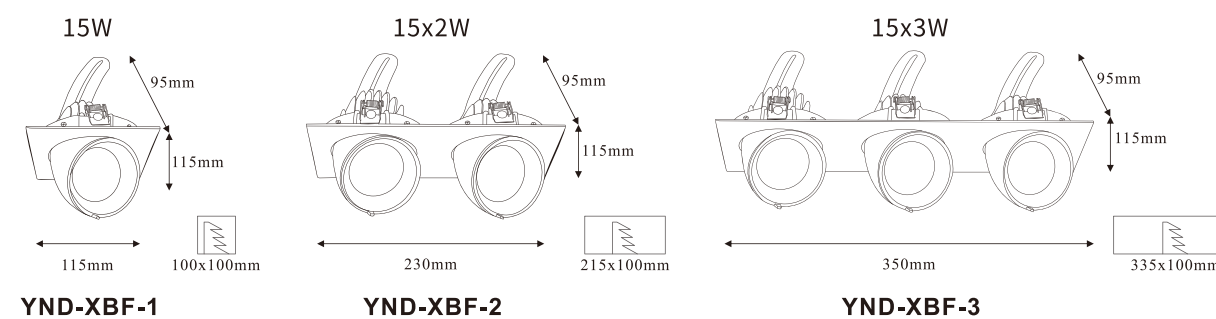




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DR2

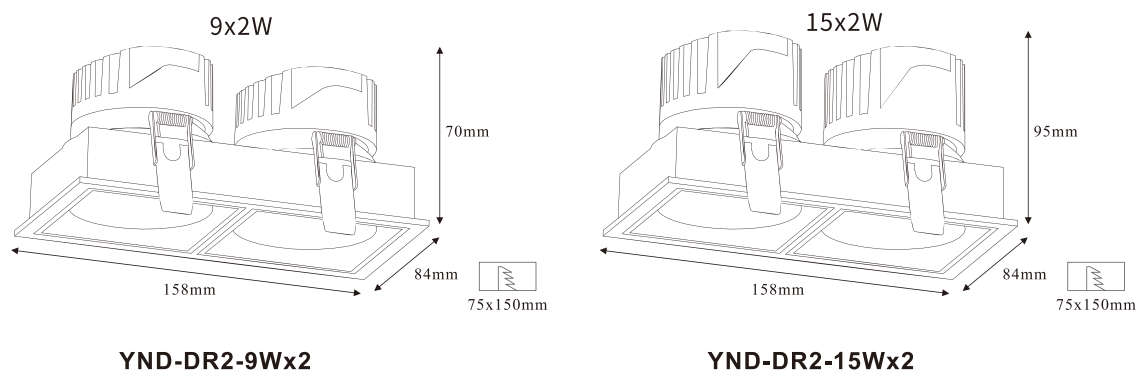


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DL

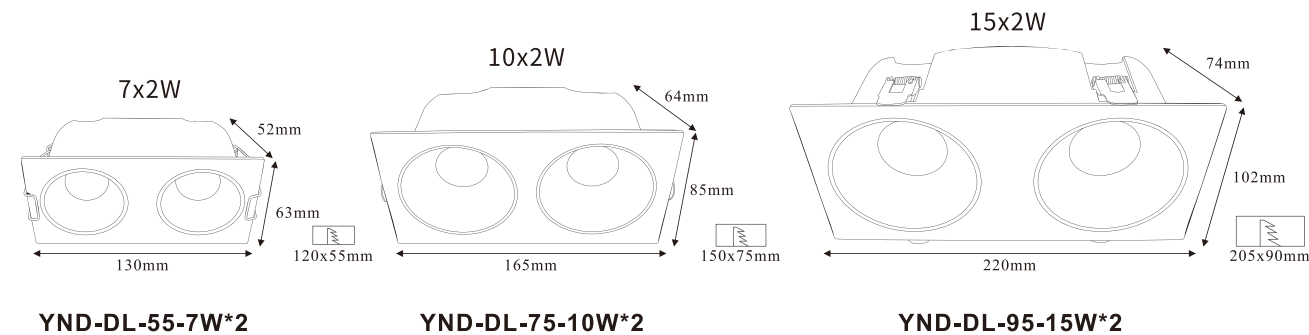


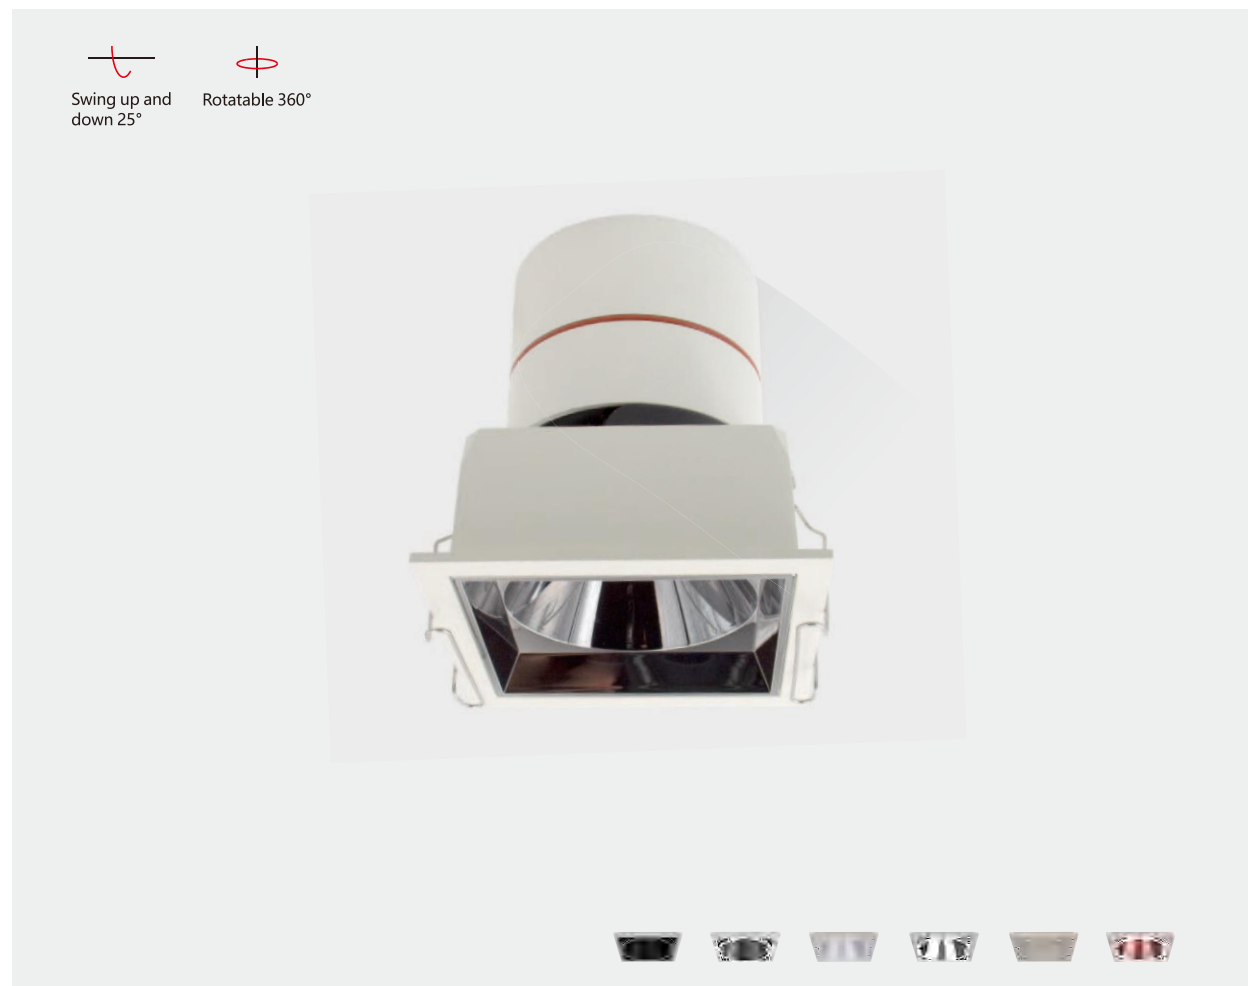


Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-Dollar




YND-Dollar07-7



YND-Dollar15-10

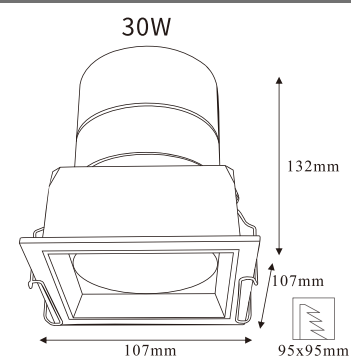


YND-Dollar19-30

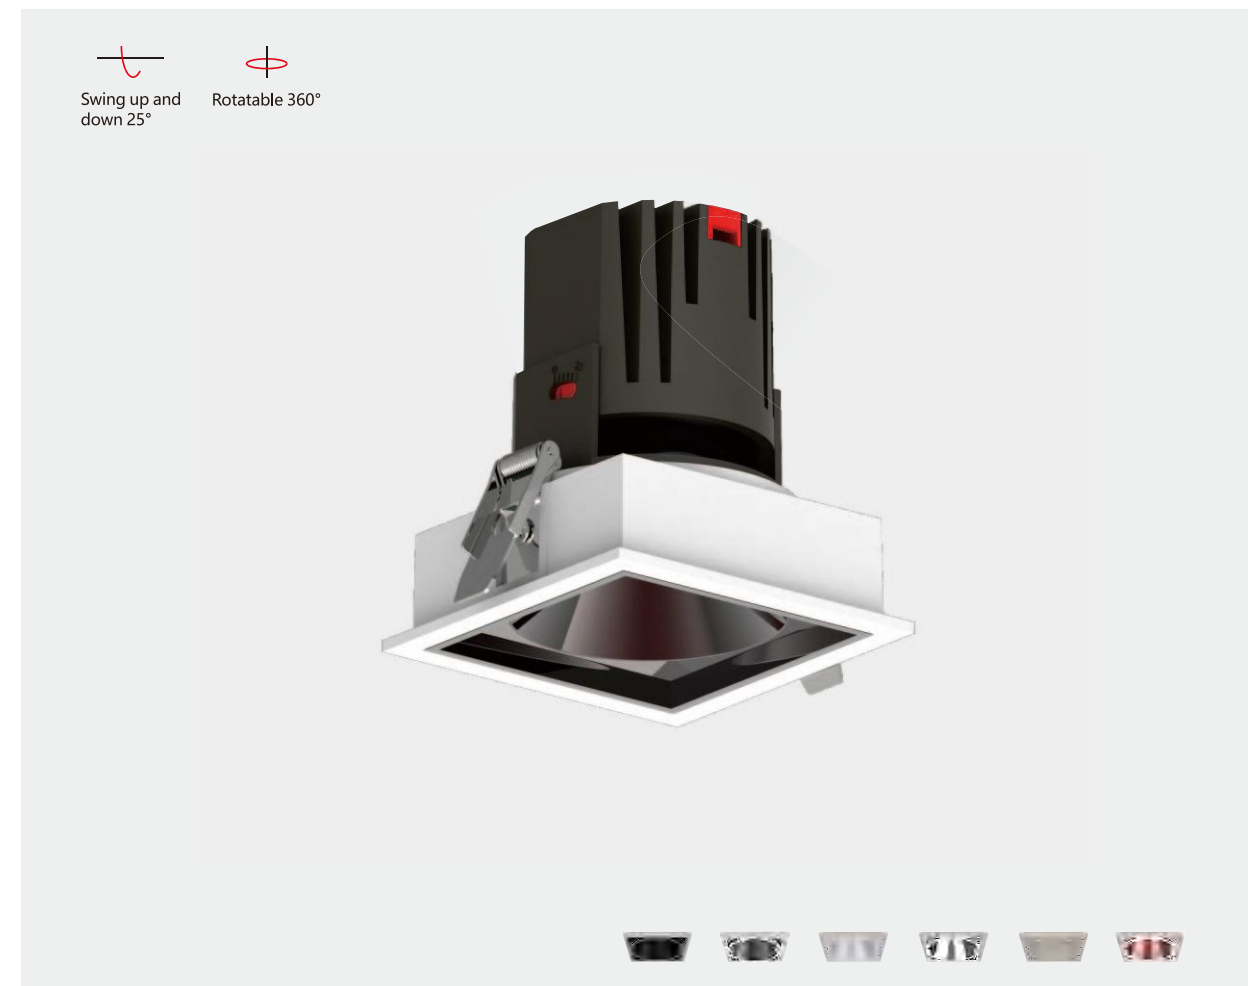

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR1F

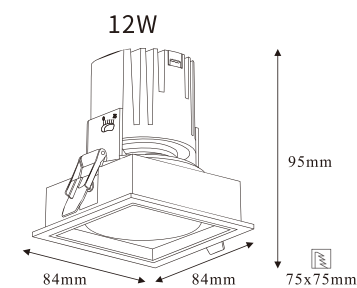


YND-DR1F-12



YND-052A

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: Polarized110°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

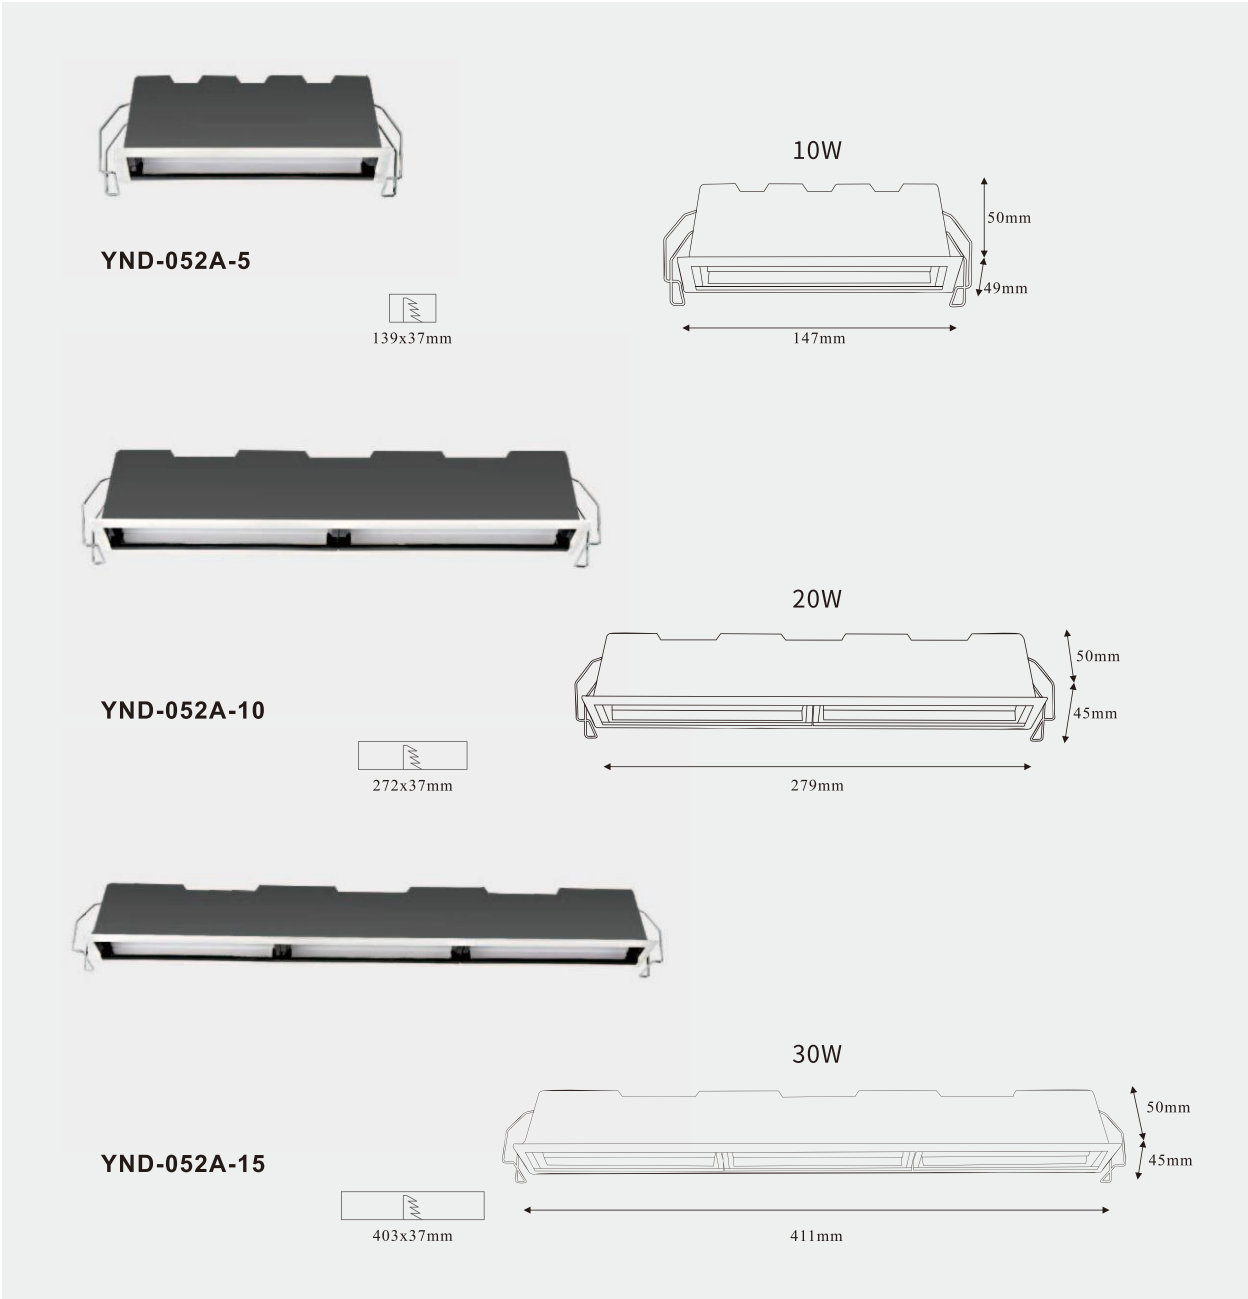




YND-052F

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/45°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

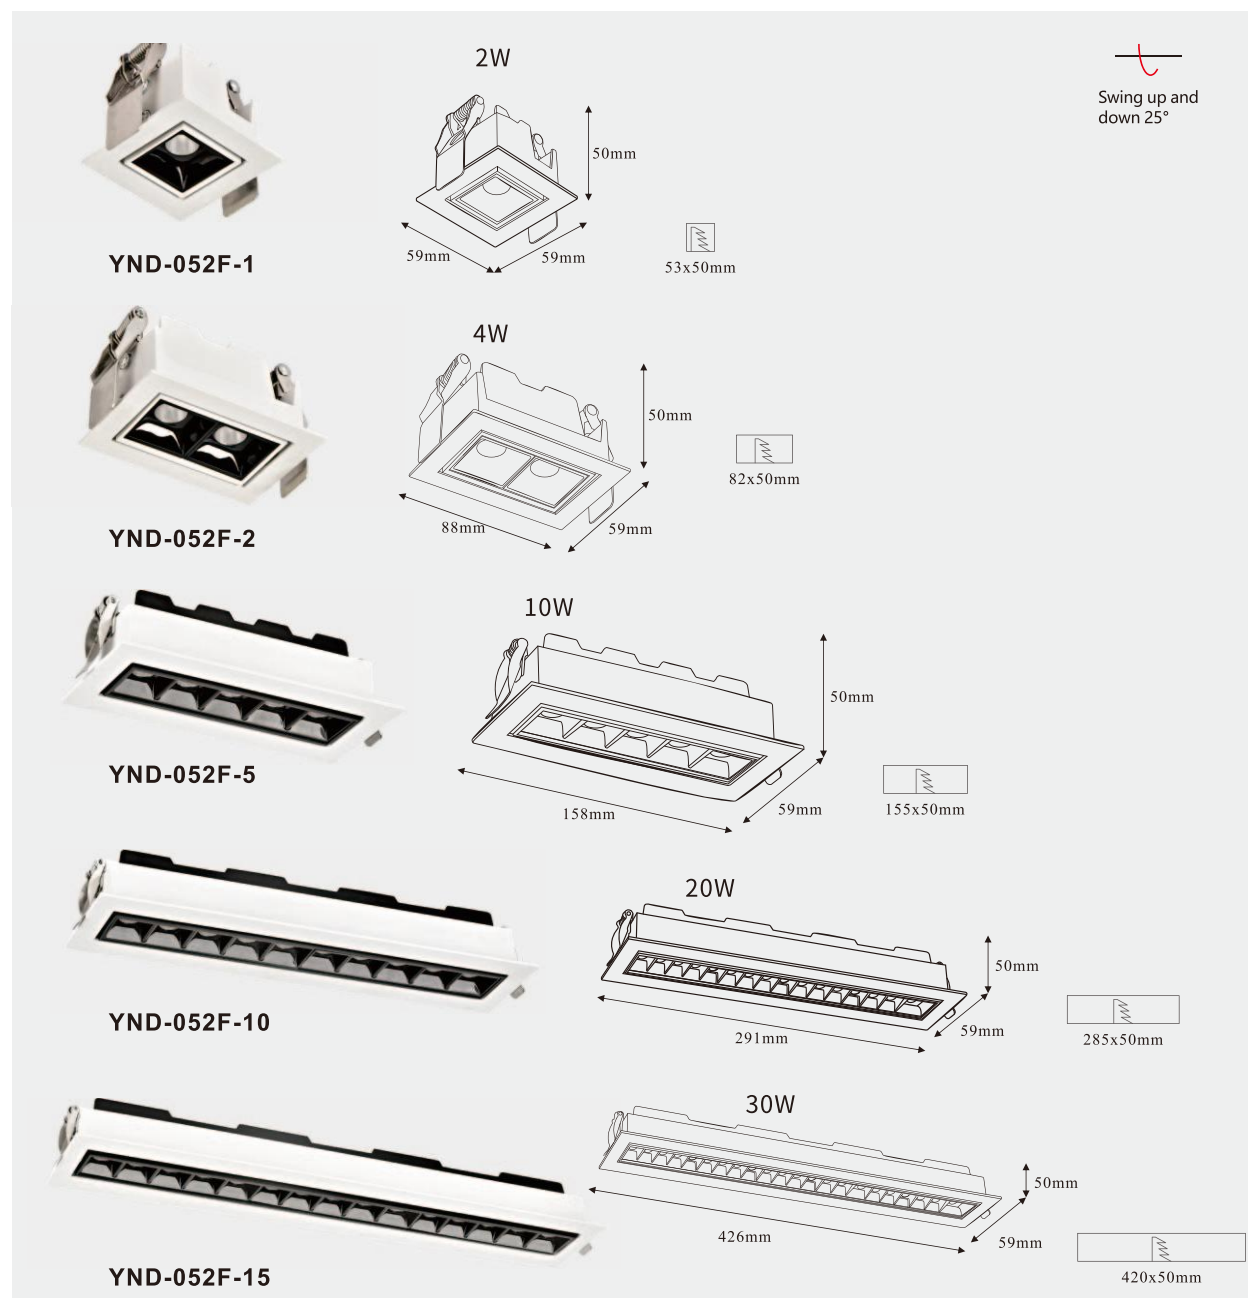

YND-052

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/45°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

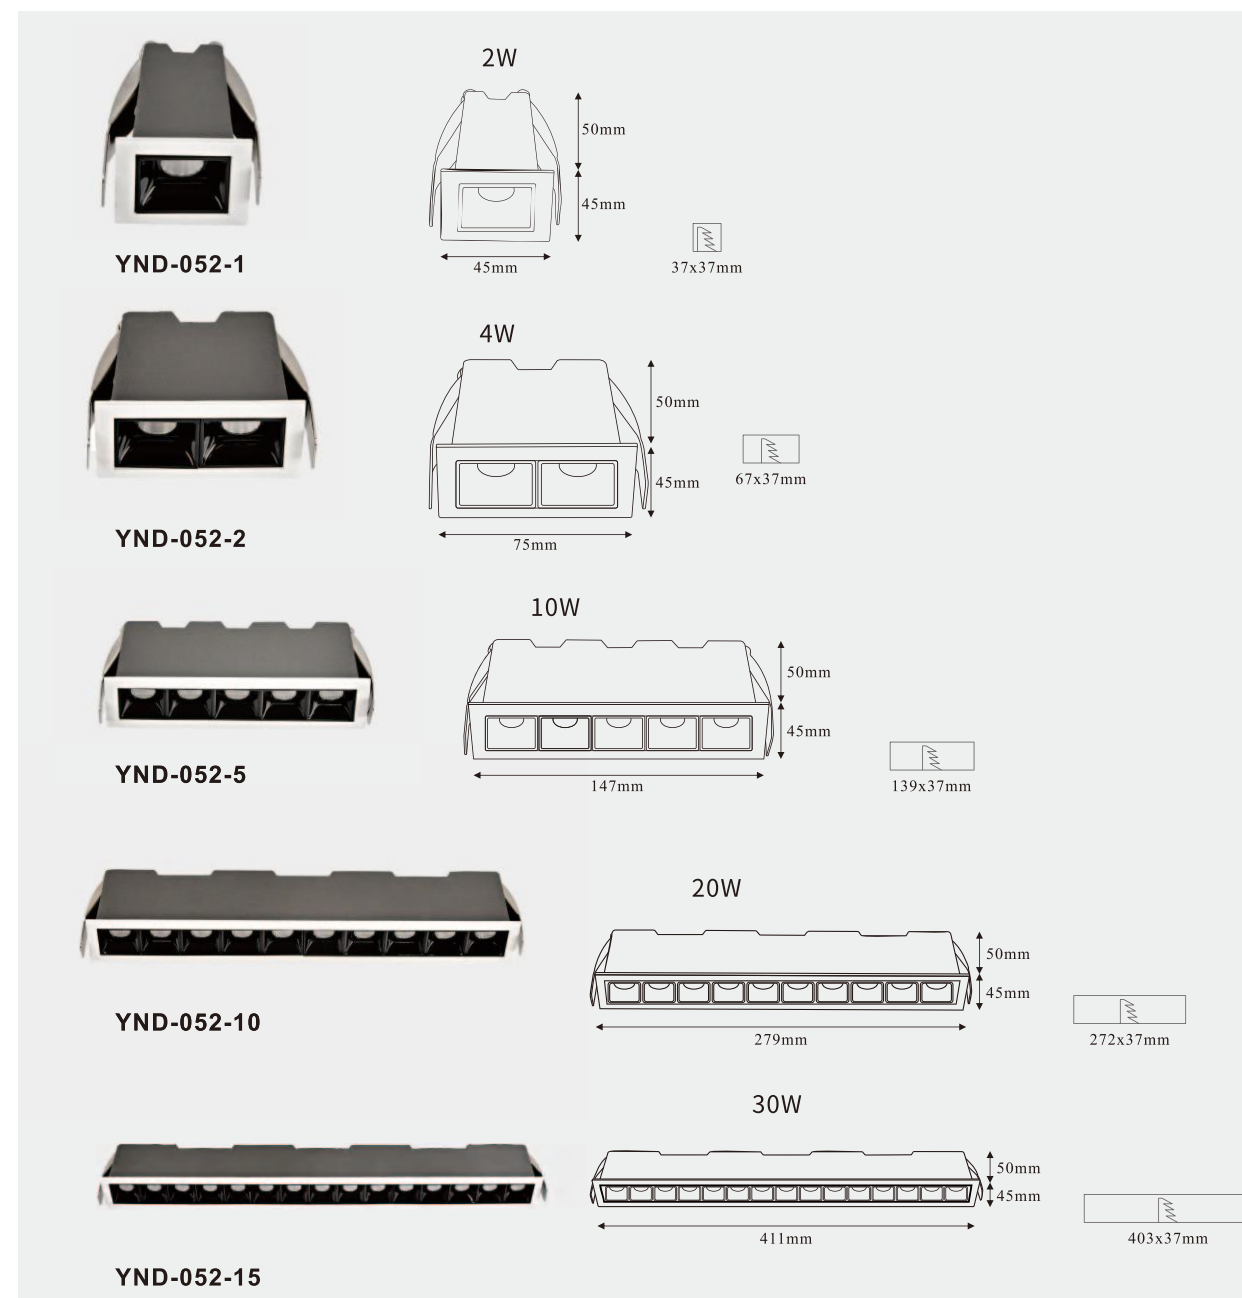



Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request


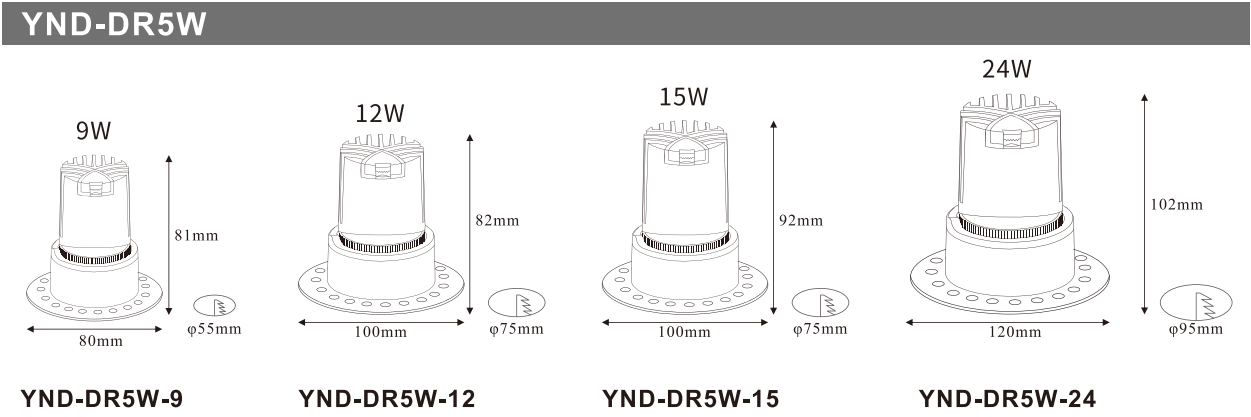




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DR1W

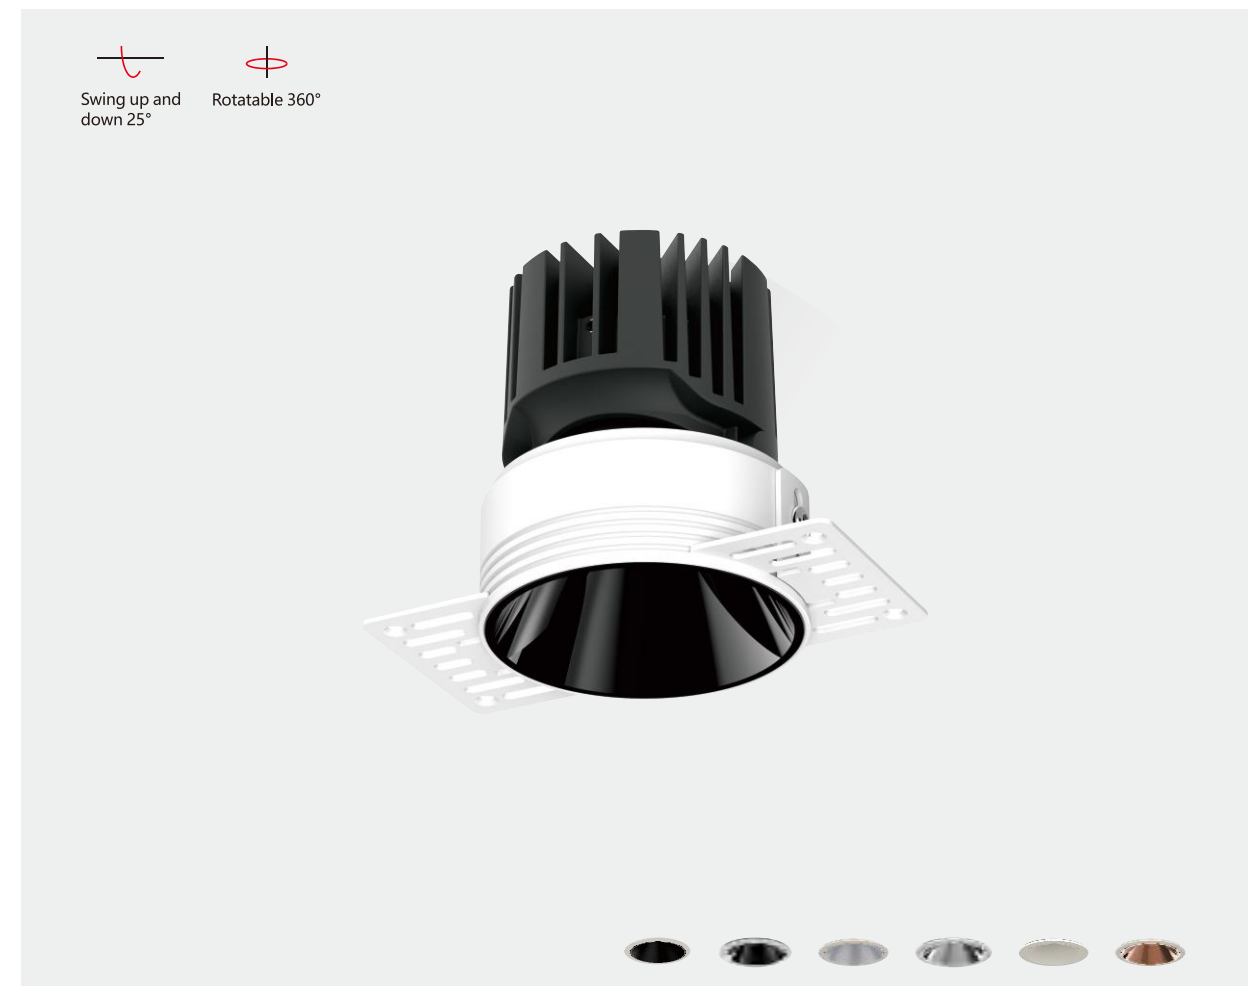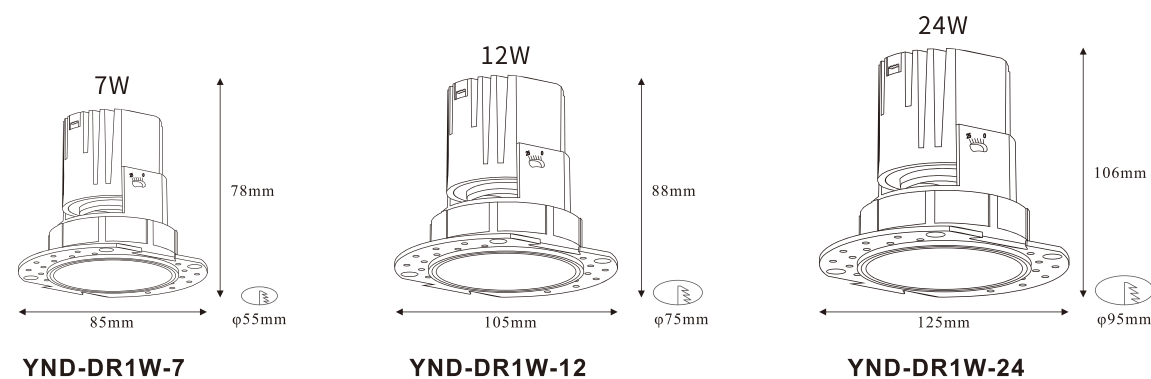

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPY1W

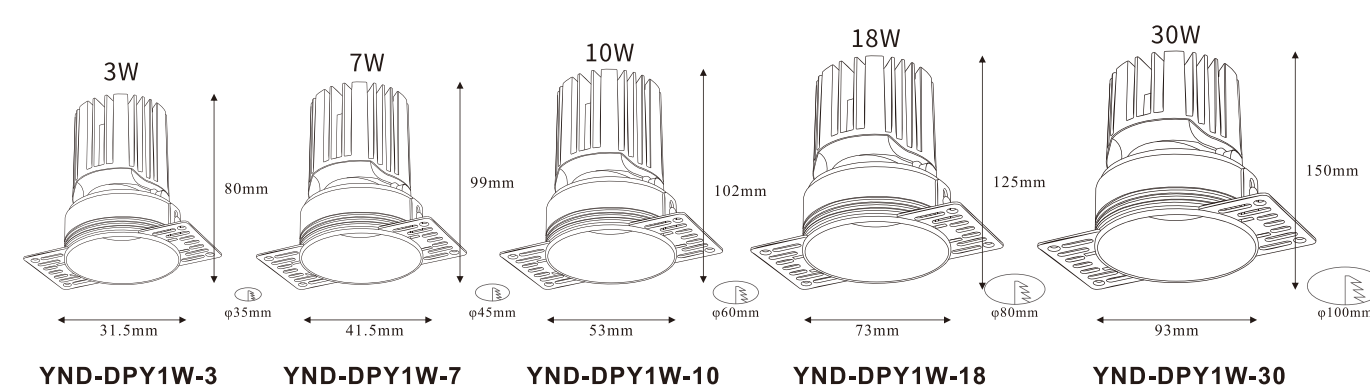



Voltage: AC220V

Material: 6063 Aluminum

Housing Color: Black/White/Customized

IP Rate: IP20

Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized


RA: ≥90/Full spectrum

Beam Angle: 15°/24°/36°/60°

Light source: Osram/Cree/Brigelux/Lumileds

IES FILE: Available On Request

YND-DPY2W


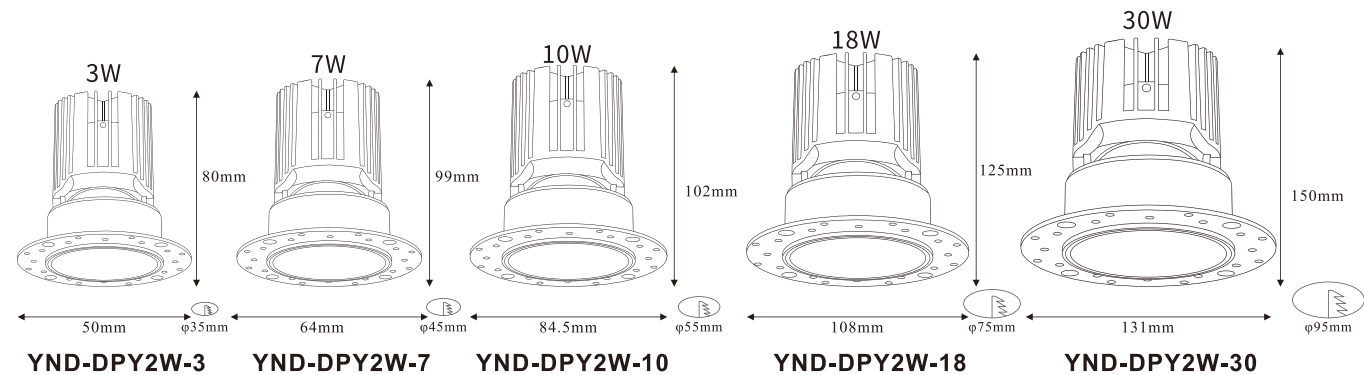




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DPFW1

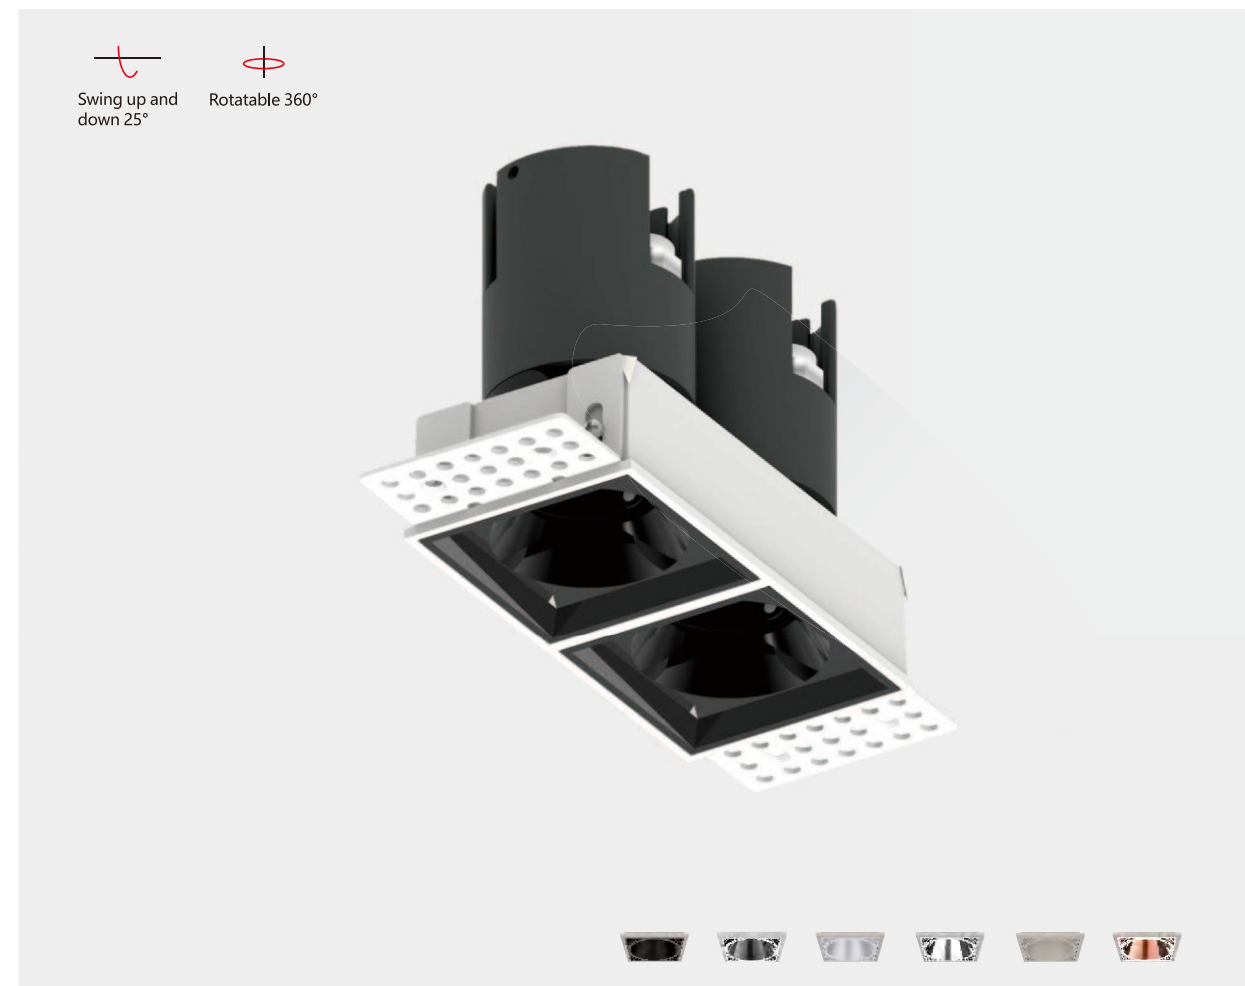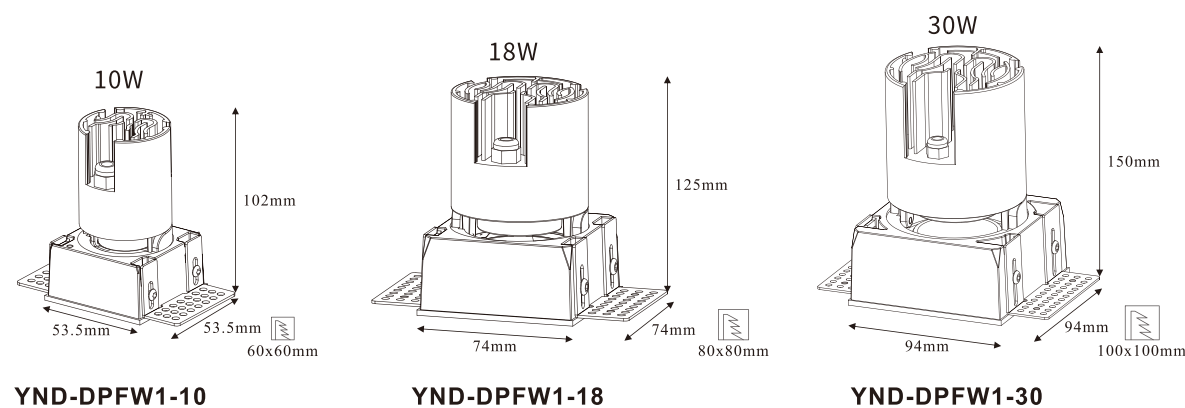

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPFW2


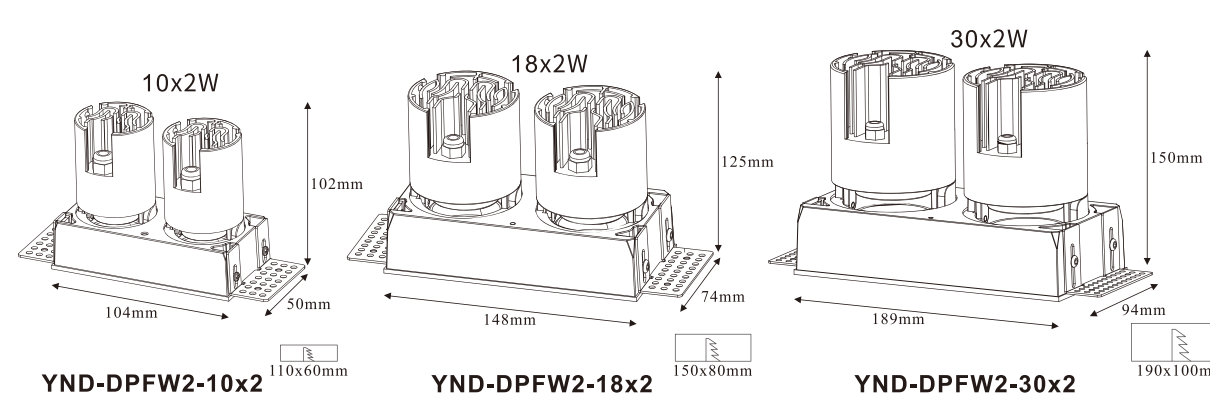




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request


YND-DPFW3

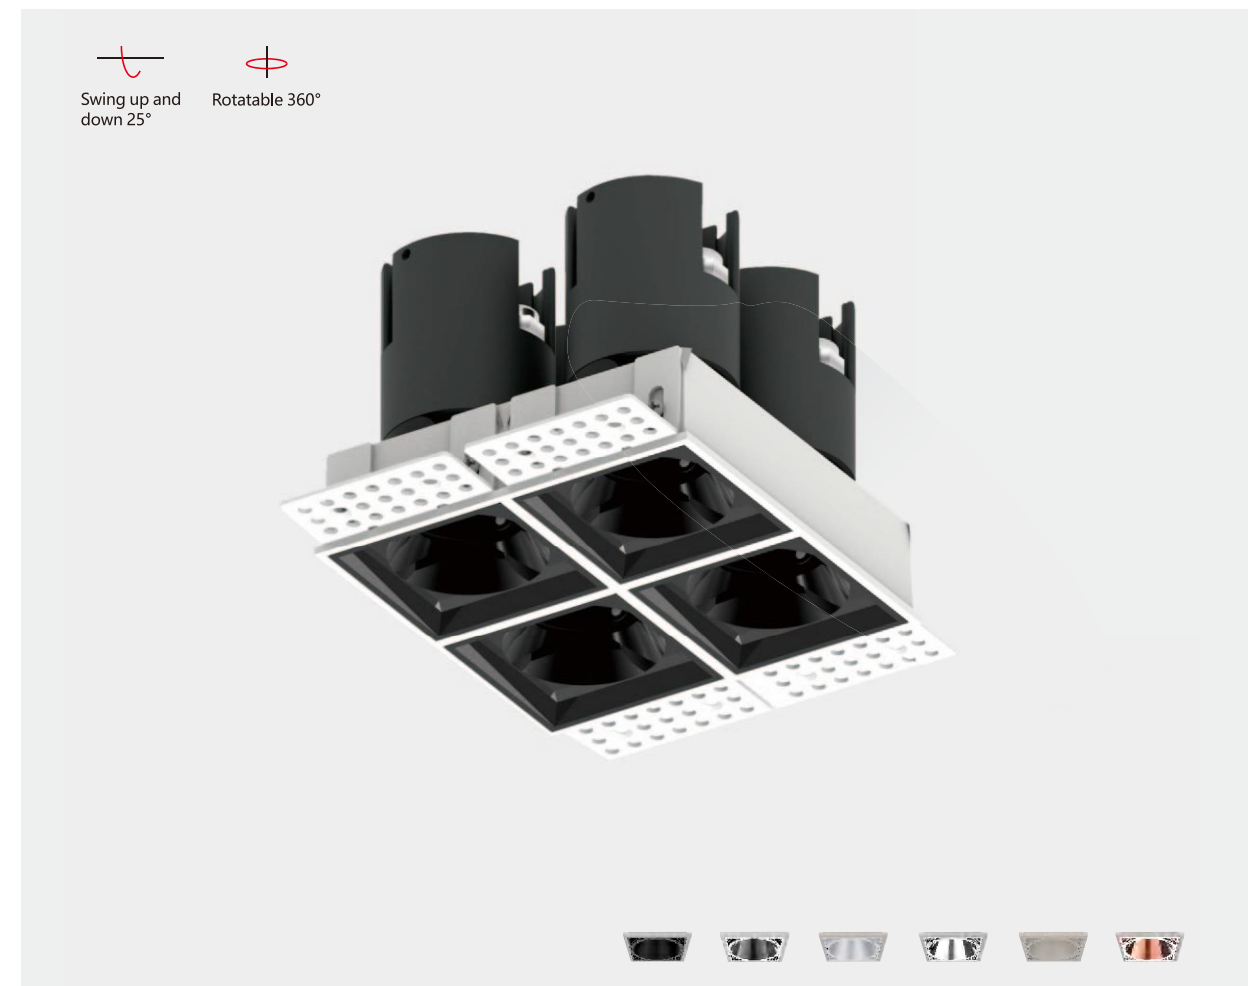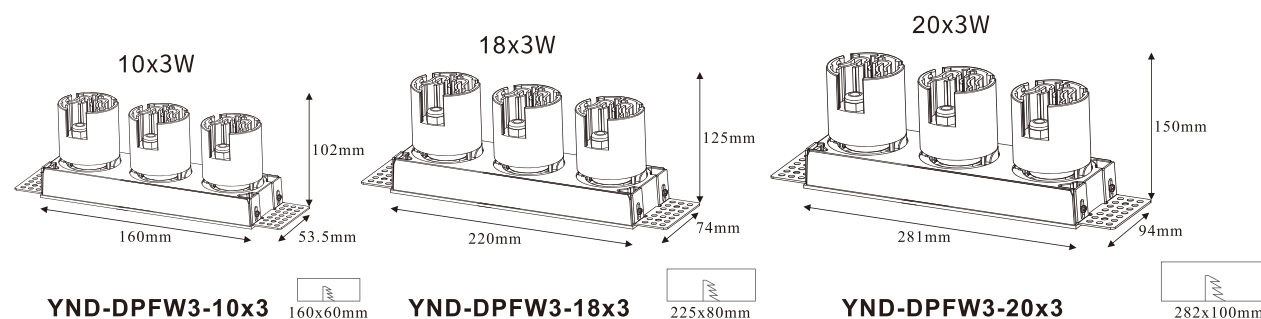

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DPFW4

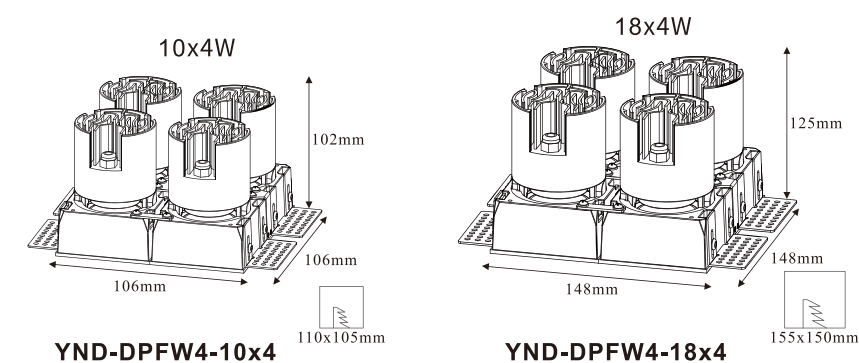




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-DR1FW

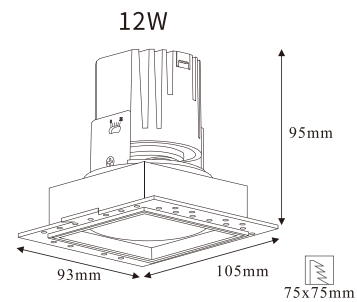

YND-DR1FW-12




YND-052W

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 15°/24°/36°/45°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request




YND-052W-3

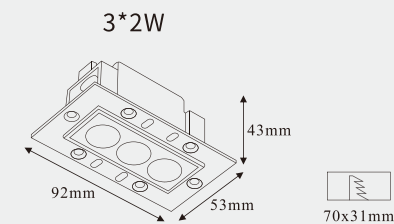

YND-052W-5

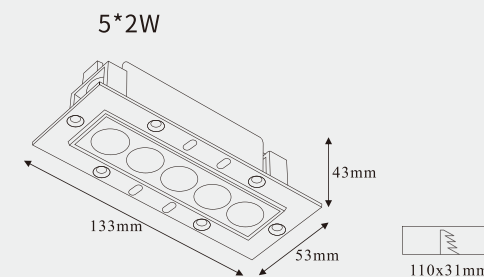

YND-052W-10

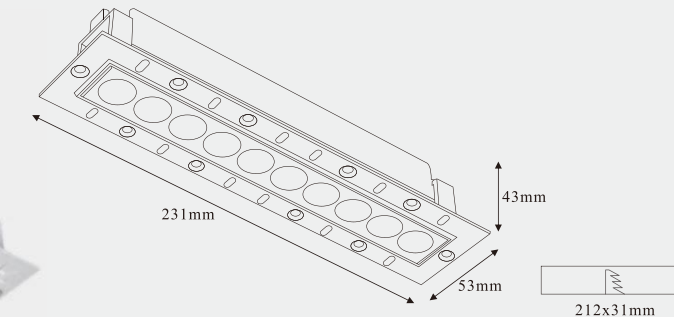





Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Smart Dimming: YES


CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥90/Full spectrum
Beam Angle: 24°/45°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

YND-DJM

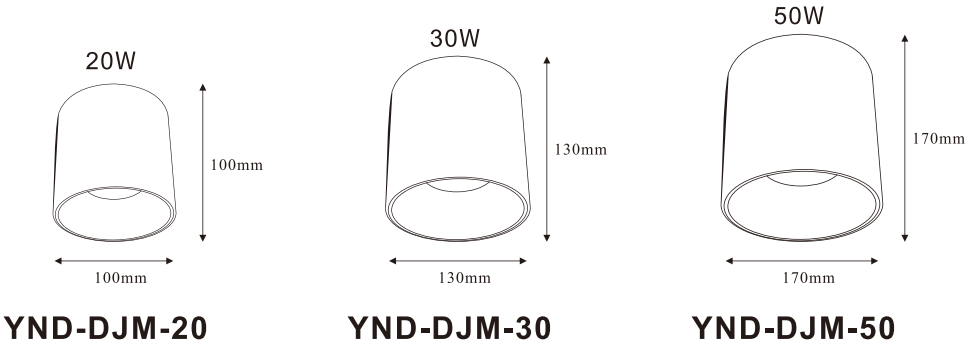

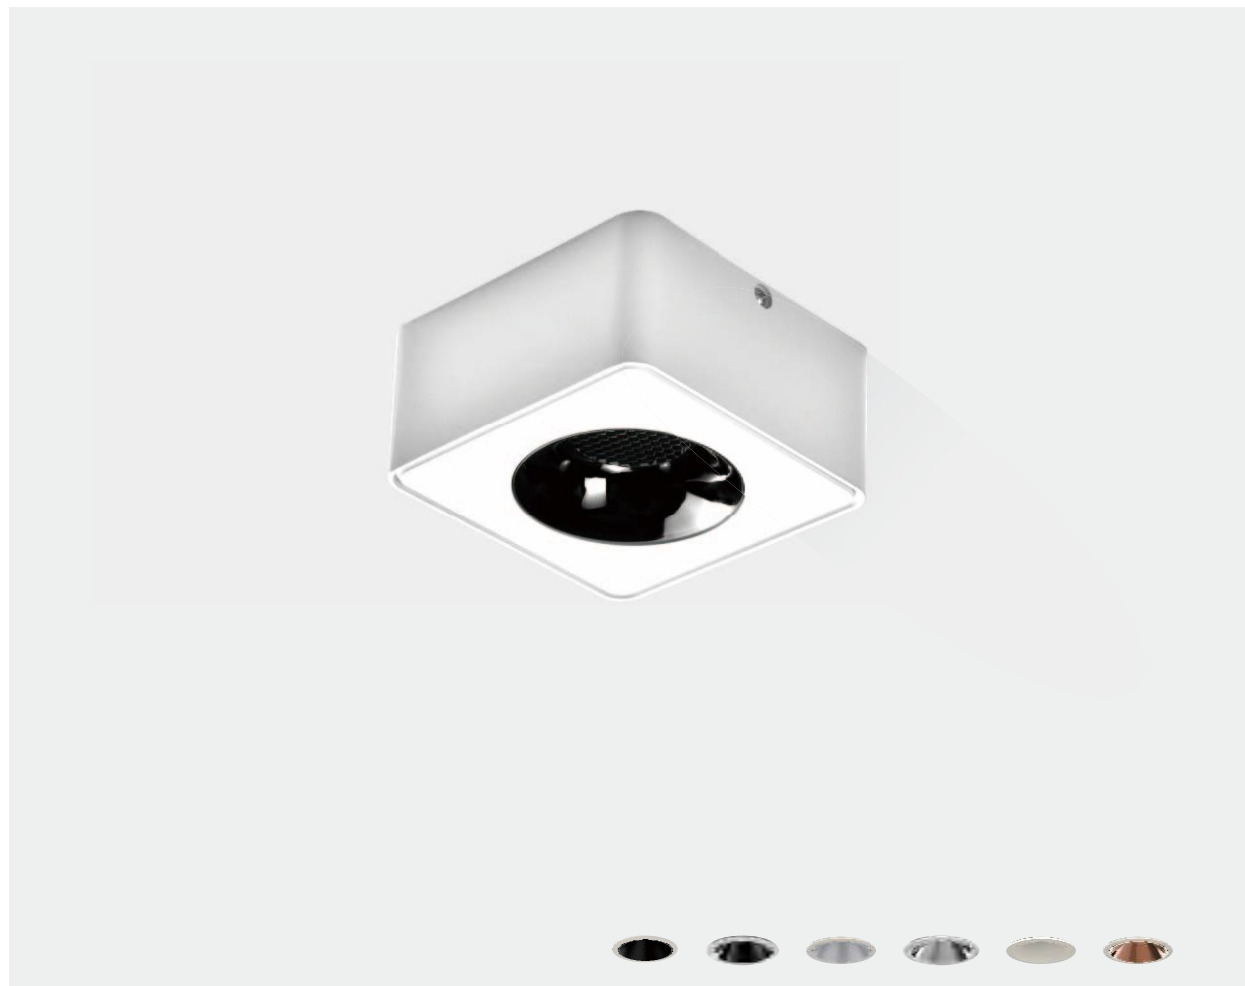

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 24°/36°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

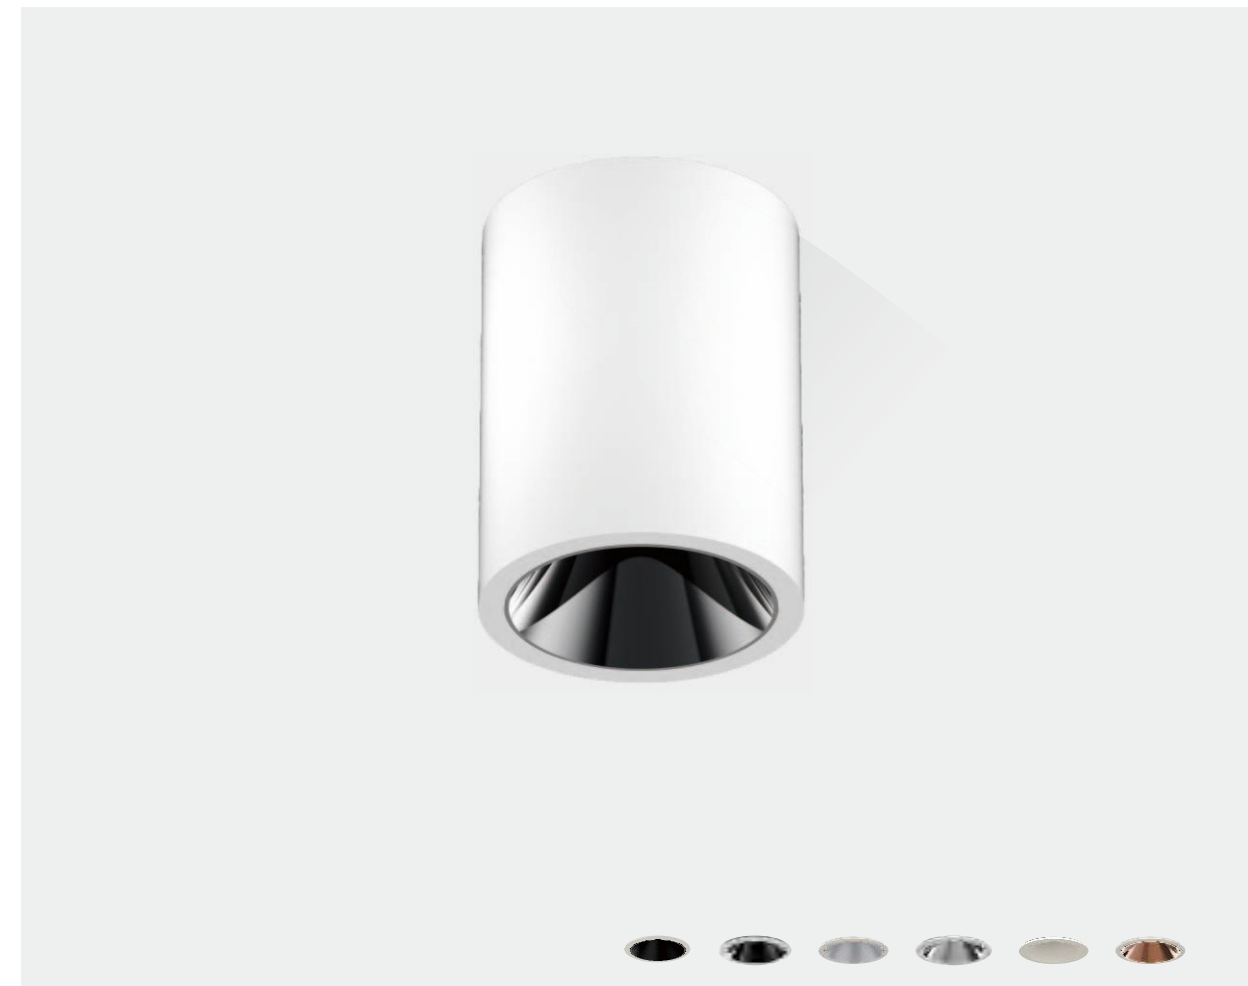73 www.yndled.com

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 36°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request


www.yndled.com 74




Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP65
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 15°/24°/36°
Light source: Osram/Cree/Brigelux/Lumileds
IES FILE: Available On Request

YND-F25

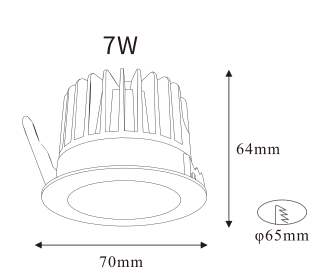

YND-F25-7W




YND-F25-10W



Voltage: AC220V
 Material: 6063 Aluminum
 Housing Color: Black/White/Customized
 IP Rate: IP65
 Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
 RA: ≥ 90 /Full spectrum
 Beam Angle: 15°/24°/45°
 Light source: Osram/Cree/Brigelux/Lumileds
 IES FILE: Available On Request

YND-F26

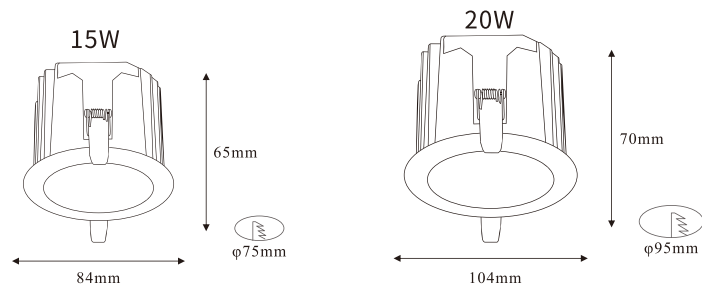

YND-F26-15


YND-F26-20



Voltage: AC220V
 Material: 6063 Aluminum
 Housing Color: Black/White/Customized
 IP Rate: IP65
 Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
 RA: ≥ 90 /Full spectrum
 Beam Angle: 15°/24°/38°/60°
 Light source: Osram/Cree/Brigelux/Lumileds
 IES FILE: Available On Request


YND-F32

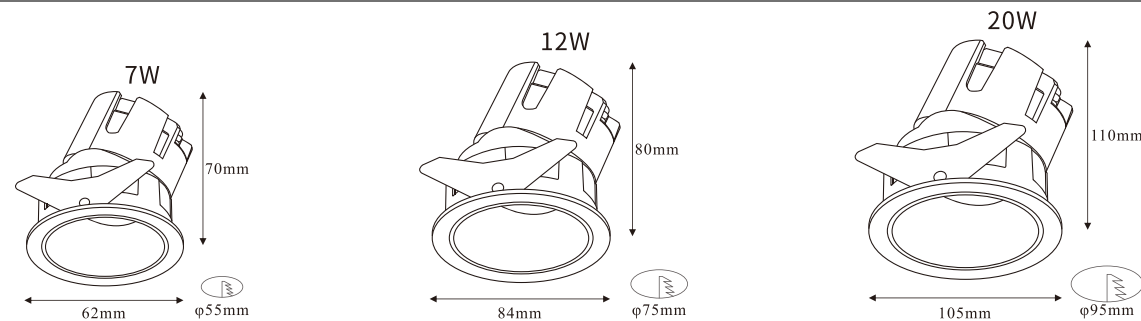

YND-F32-7

YND-F32-12


YND-F32-20

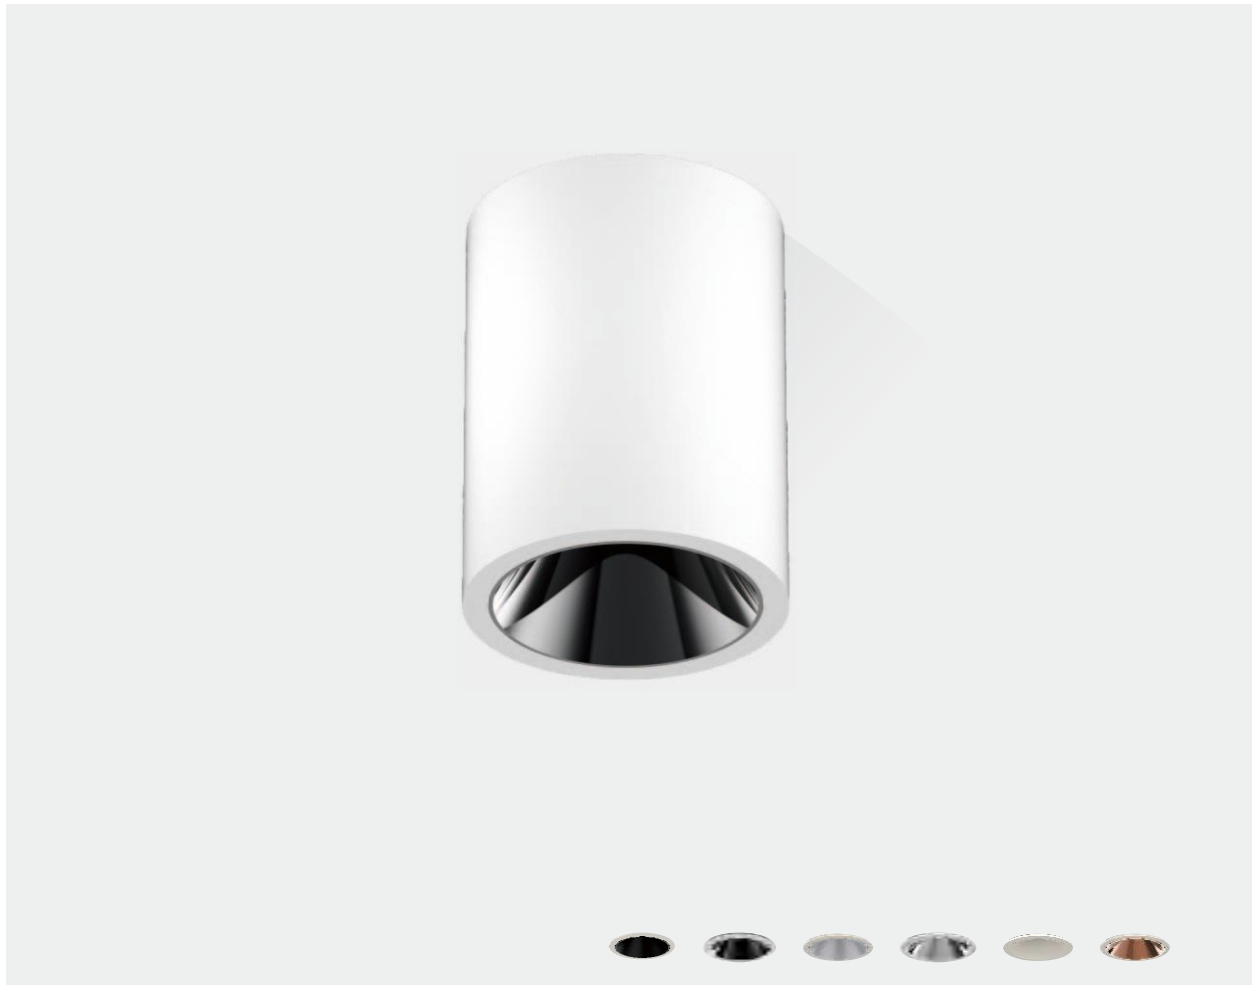

Voltage: AC220V
Material: 6063 Aluminum
Housing Color: Black/White/Customized
IP Rate: IP65
Smart Dimming: YES

CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable /Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 36°/60°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

YND-FDX

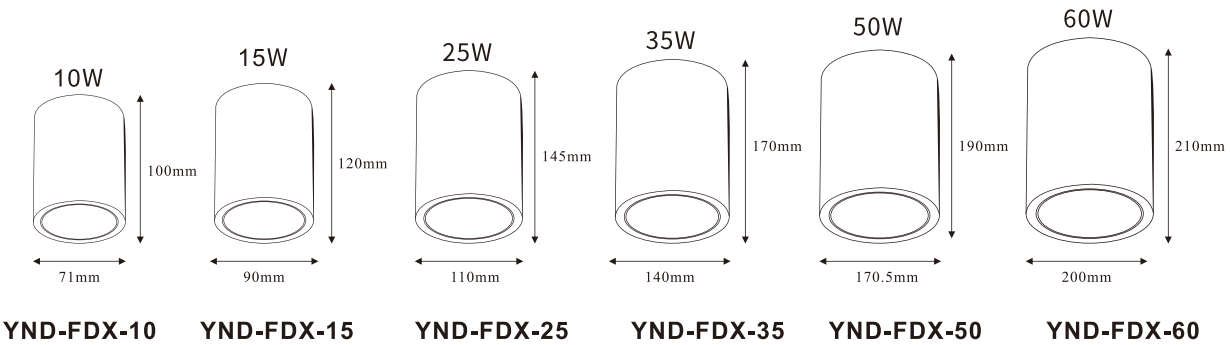



CCT: 3000K/4000K/6000K/Dimmable & CCT Adjustable
/Customized
RA: ≥ 90 /Full spectrum
Beam Angle: 80°
Light source: Osram/Cree/Brigellux/Lumileds
IES FILE: Available On Request

Technical drawings of five YND-Q2 series LED light fixtures, showing top and side views with dimensions:

- 10W (YND-Q2-10):** Top view diameter 115mm, side view height 48mm, mounting hole diameter $\phi 95\text{mm}$.
- 18W (YND-Q2-18):** Top view diameter 145mm, side view height 60mm, mounting hole diameter $\phi 125\text{mm}$.
- 20W (YND-Q2-20):** Top view diameter 159mm, side view height 60mm, mounting hole diameter $\phi 140\text{mm}$.
- 30W (YND-Q2-30):** Top view diameter 190mm, side view height 60mm, mounting hole diameter $\phi 165\text{mm}$.
- 40W (YND-Q2-40):** Top view diameter 230mm, side view height 72mm, mounting hole diameter $\phi 200\text{mm}$.